


Service Note

Product	Description:	Service note no.
SDI cards	Glue added on diodes	SNo-T0112

Reason for note:

Diodes on SDI cards (only HW version 203 – identified by visible Firewire connector on the backplate) are easily broken off when mounting/dismounting the card in frames. Therefore heating glue is added according to the picture. To be added when cards are in for repair.

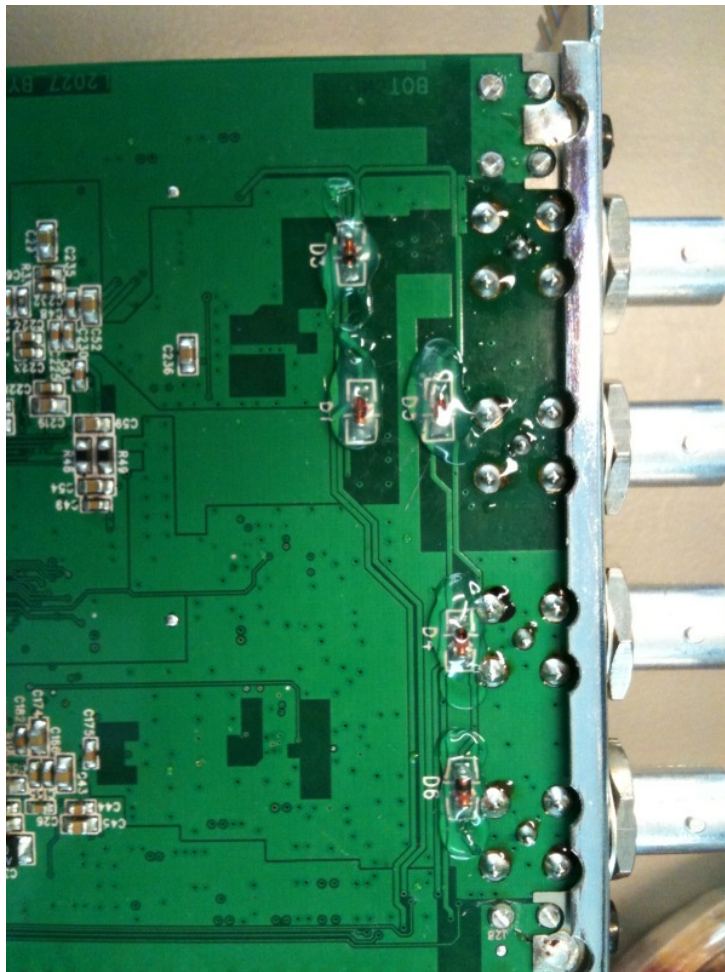

Actions:

Heating glue to be added when cards are in for repair.