
Service Note		
Product	Description:	Service note no.
TC2290	"Scratch" When Turning Gain-pot:	706 10 T067

IMPORTANT: When having 2290s with s.no. lower than 510335 for repair or service please make this correction.

Solution:

Please cut out R527 that are placed just besides of the RT501. Removing R527 will eliminate the sound to "Scratch" when turning the gain-pot.

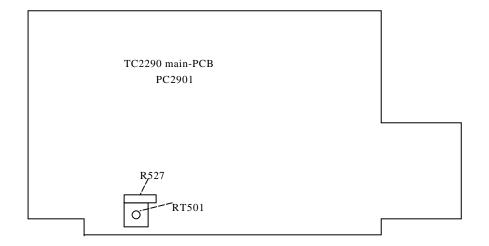

Filename: SNo_T067.doc Date: 11-04-2007 ID:Thsig