

<b>Service Note</b>		
Product	Description:	Service note no.
<b>M2000</b>	<b>Upgrade to 24bit AD/DA Converters</b>	<b>720 10 01 04</b>

**IMPORTANT:**

This note only concerns units with serial no. lower than 1110000.  
The upgrade should only be carried out by authorized technicians.

**Procedure:**

1. Use a PCMCIA card to make a copy of the user presets.
2. Turn Off Power and Disconnect Power Cord.
3. Remove the top lid by loosening the five screws shown in Fig. 1.
4. Disconnect the front connector J2, see fig. 2.
5. Remove the front section by loosening the four screws shown in Fig. 2.
6. Remove screws at MT7, MT8, MT2 on the main board.
7. Remove screws at the XLR connectors on the back panel, see fig. 3
8. Remove screw at SPDIF in/out connector, see fig. 3.
9. Remove jack nut at PEDAL IN, see fig. 3.
10. Desolder the seven wires from power supply and remove the main board.
11. Mount the new main board. Reverse order of 6 – 10.
12. Mount the front section with the four screws, see fig. 2. Make sure the edge of the chassis is pressed into the front profile.
13. Connect the front connector J2.
14. Mount the top lid with the five screws.
15. Connect power and load in the user presets.

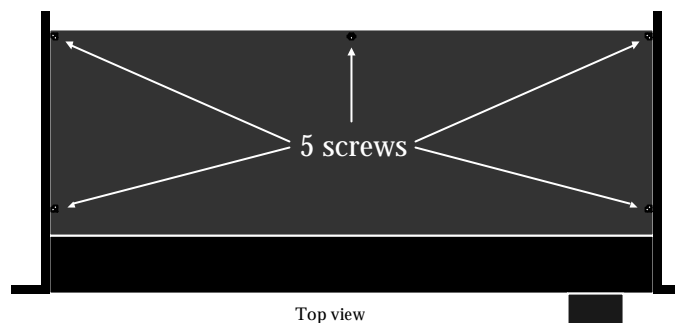


Fig. 1: Screws on top lid

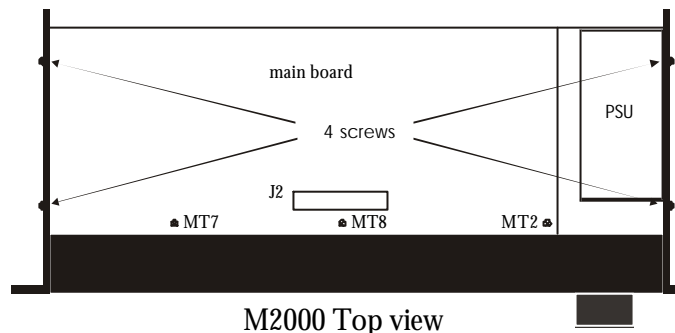


Fig. 2: Location of front connector and screws.

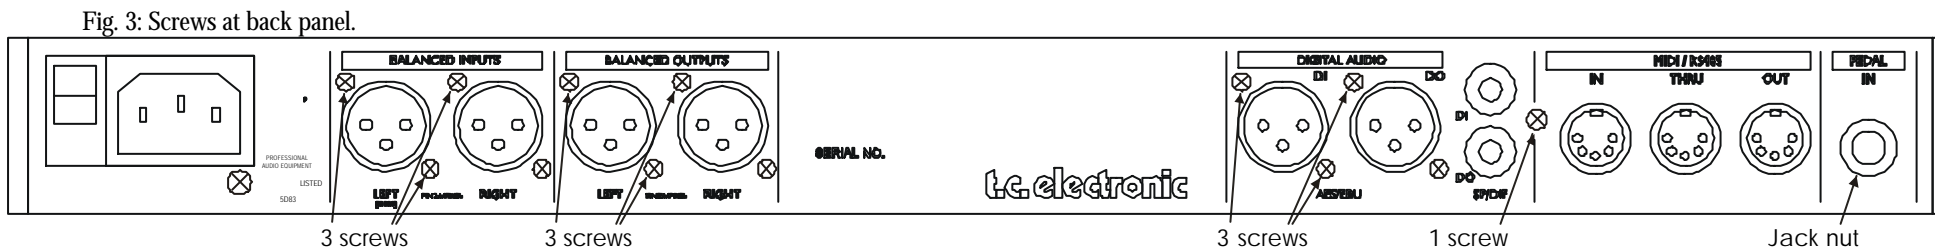


Fig. 3: Screws at back panel.