

Section
-

Document #
-

Revision
A

Document owner
KRA

Date
19-03-2014

Page 1 of 1


Version	Changed:	Approved by:	
		Service manager	Project manager
A	First version of document	DVQ	

Replaceable parts:

- Woofer
- Electronics module

Woofer replacement:

1. Unmount the 6 screws
2. Lift woofer out of cabinet
3. Remove cables from woofer
4. Remove gasket from woofer hole
5. Put new gasket around cabinet hole
6. Mount cables on the new woofer connectors. Red wire is +
7. Put woofer into cabinet hole
8. Carefully remount screws
9. Hi-pot testing. 2.5kV.
10. Function testing

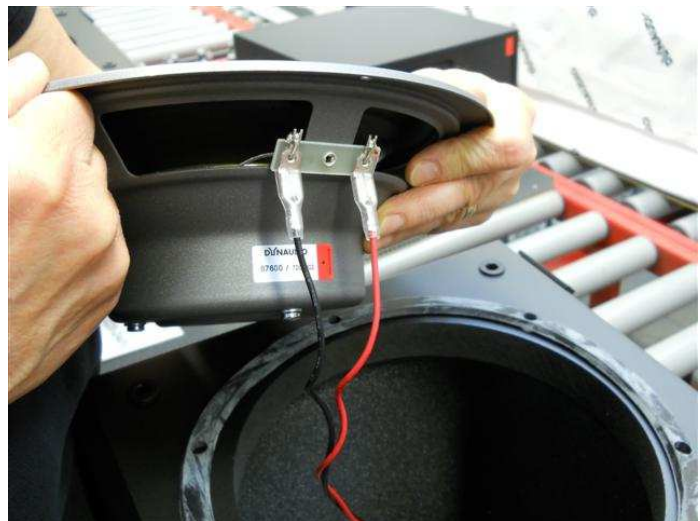

Electronics replacement

1. Remove power from electronics
2. Unmount 12 screws (highlighted)
3. Remove electronics carefully from the cabinet
4. Unmount speaker wires
5. Mount speaker wires on the new electronics. Red wire is +
6. Carefully insert electronics into cabinet
7. Carefully Remount 12 screws (highlighted)
8. Hi-pot testing. 2.5kV
9. Function testing

