


THIRD ANGLE PROJECTION



NOTES


1. ENSURE ALL COMPONENTS AND WIRES ARE SECURELY FIXED IN PLACE USING HOTMELT, WITH DESCRIPTIONS VISIBLE.
2. ALL ELECTRICAL CONNECTIONS TO BE SOLDERED.
3. ADHESIVE SEALANT (BLACK TITE) TO BE USED TO SECURE COMPONENTS R2 , R3 AND GOLD TERMINALS - *
4. SILICON GREASE TO BE APPLIED TO COMPONENT R1 BEFORE FIXING TO HEAT SINK.
5. USE SILVER LINK WIRE WHERE REQUIRED ENSURING THEY ARE SECURELY FIXED IN POSITION.

Part No. 7300 1138

First used on WESTMINSTER/R

Issues



1	15.05.06	BM
2	28.09.06	BM TERMINAL WAS 4783 0407 QTY 10 CR 8616
3	11.10.06	BM COMPONENTS ADDED CR 8619
4	15.01.07	BM SLEEVING WAS 4870 0160 CR 8637
5	15.07.10	MS C1 WAS 7100 0169 CR 8786

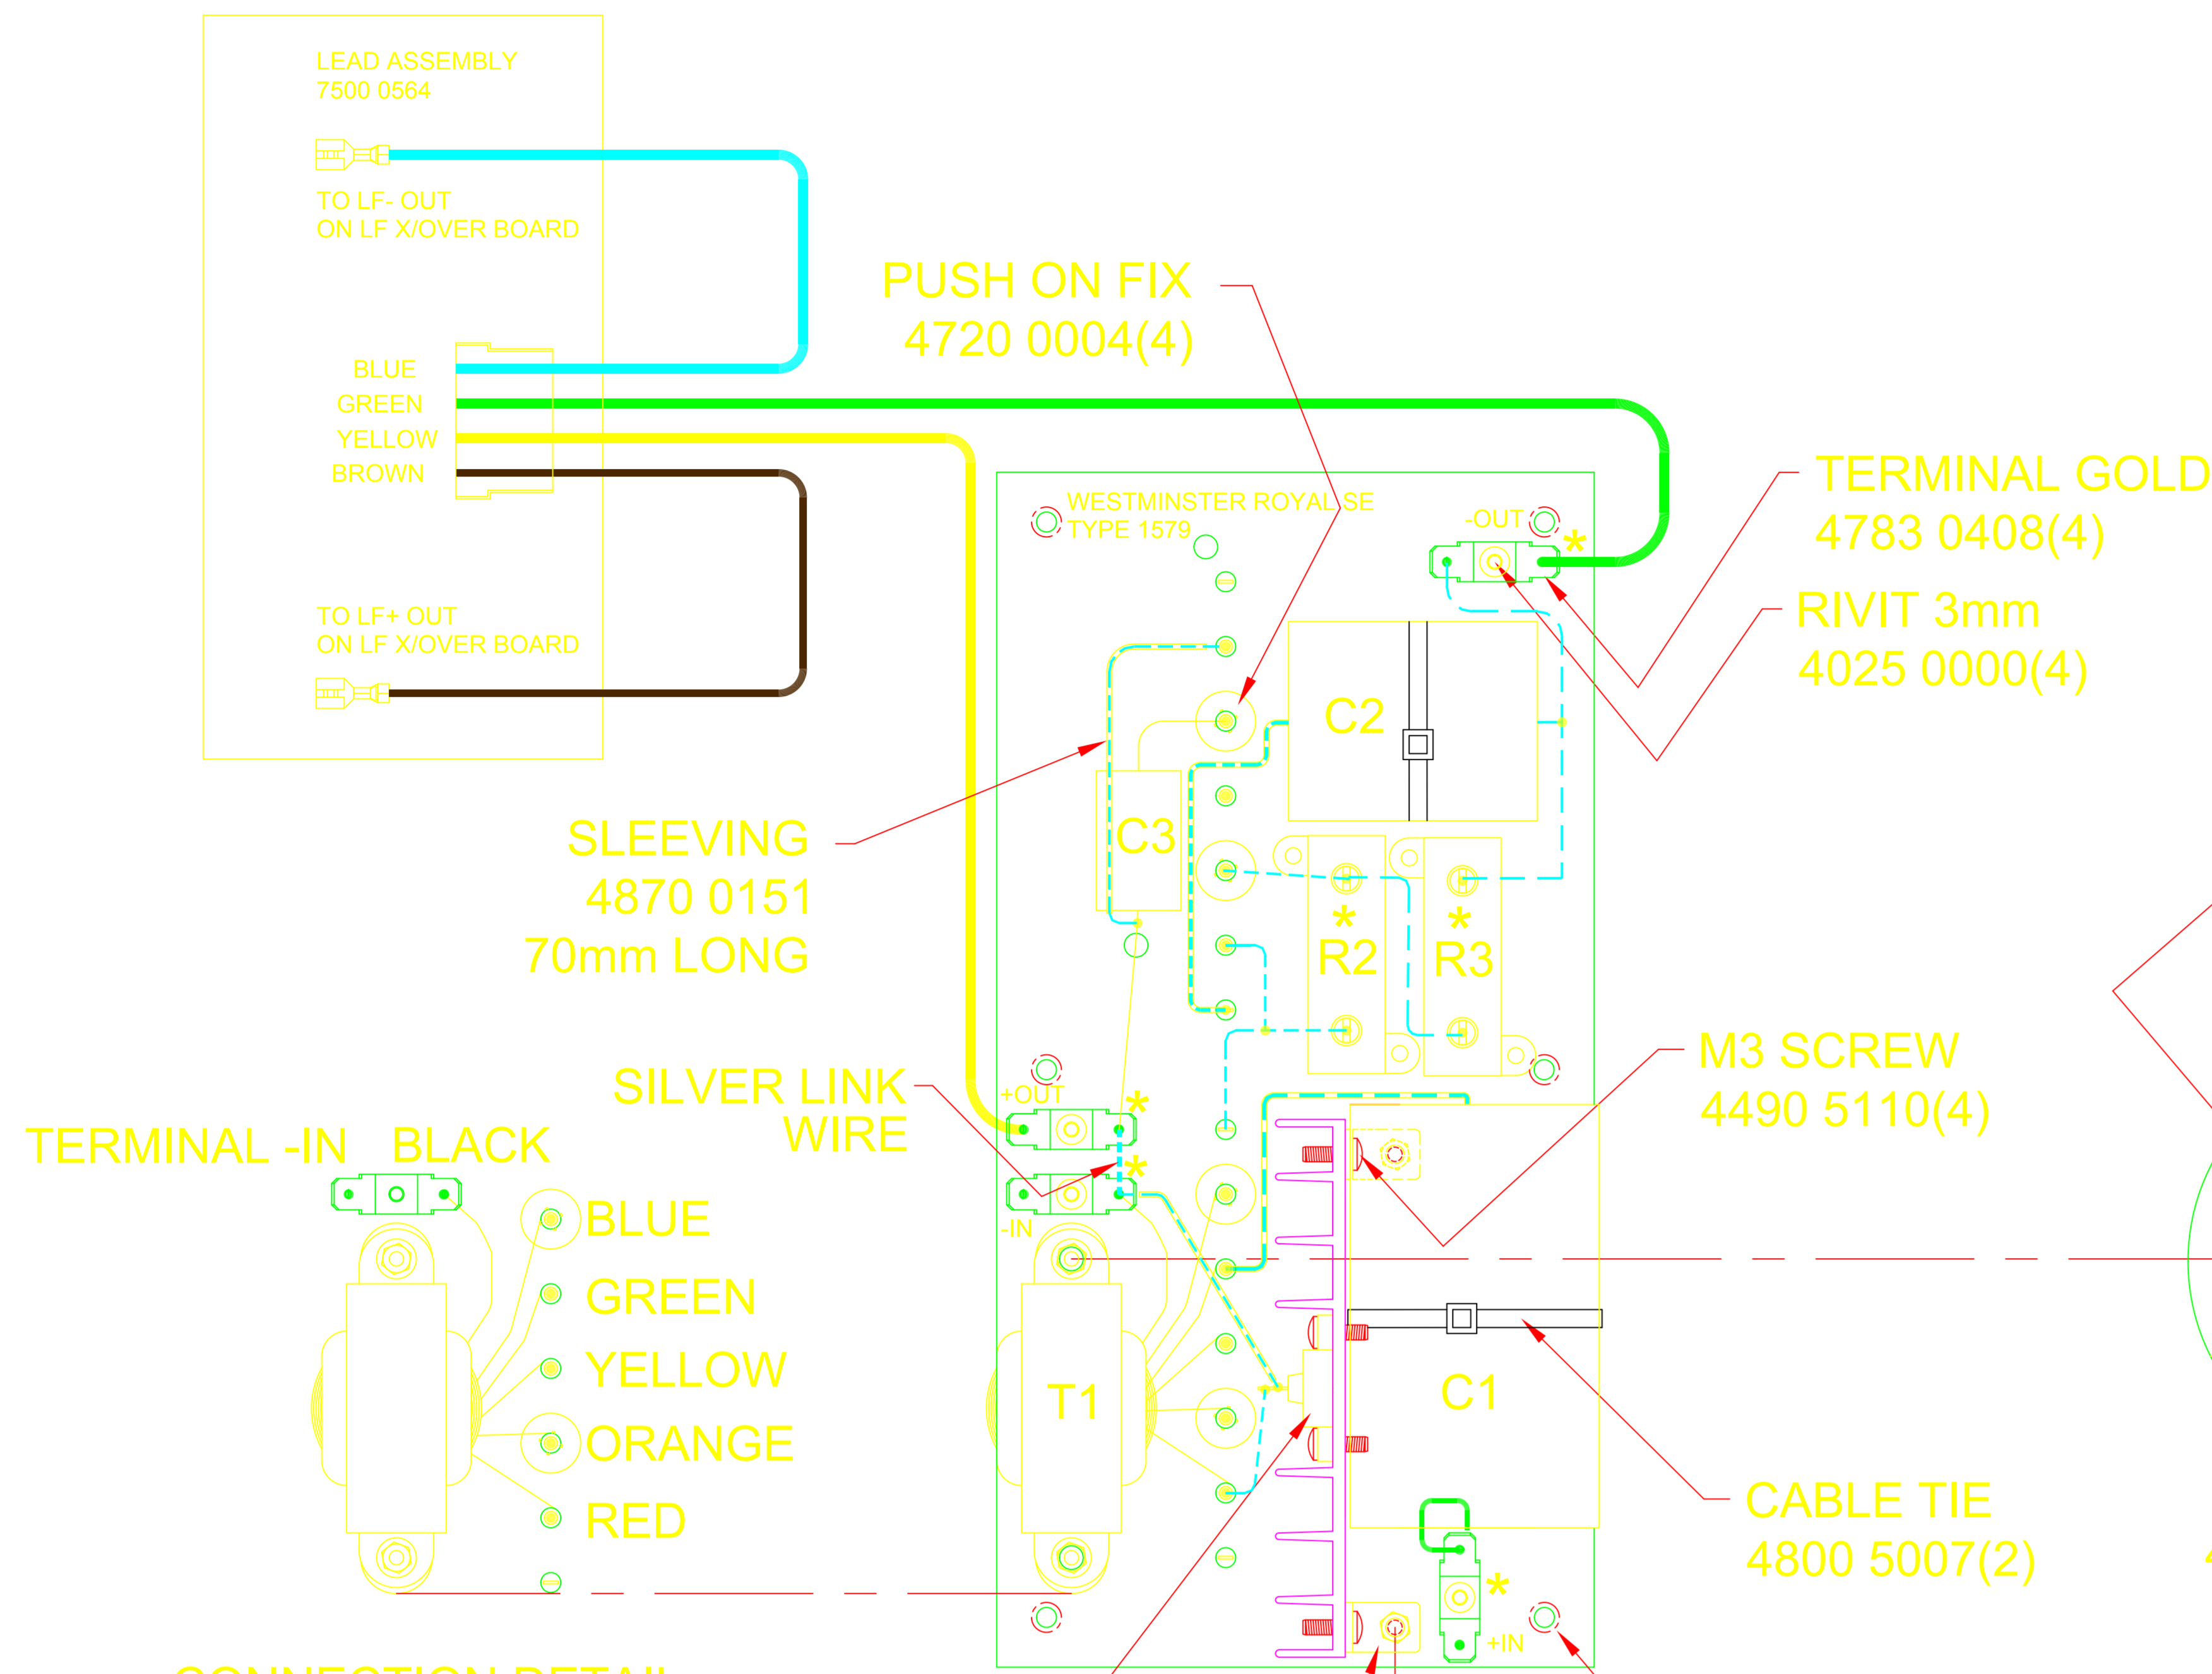

INDICATES POSITIONS OF SLEEVING REQUIRED TO INSULATE SILVER LINK WIRE

INDICATES POSITIONS OF SILVER LINK WIRE

HC SWITCH ASSY - 5 WAY ROLL OFF 7600 0448

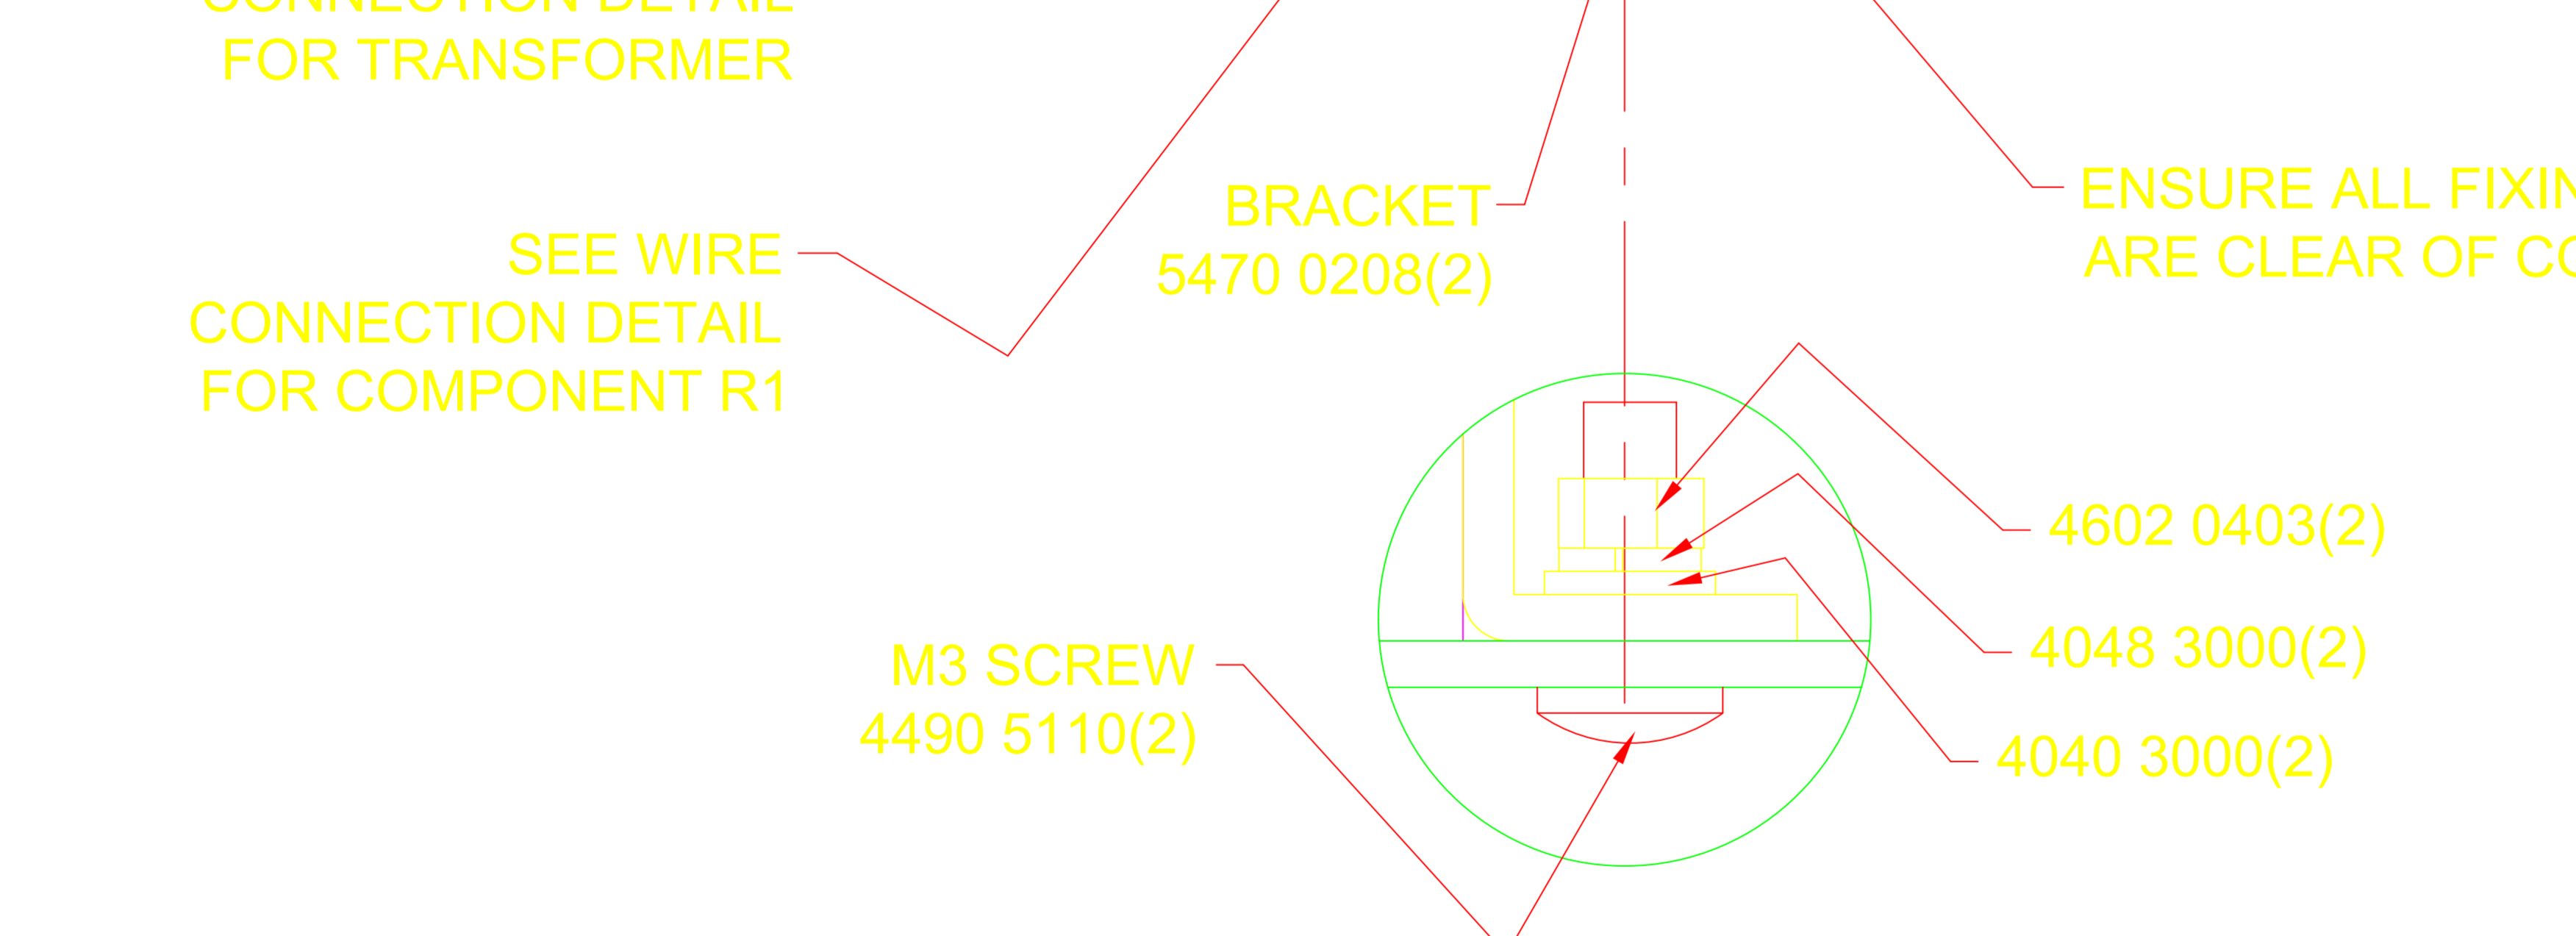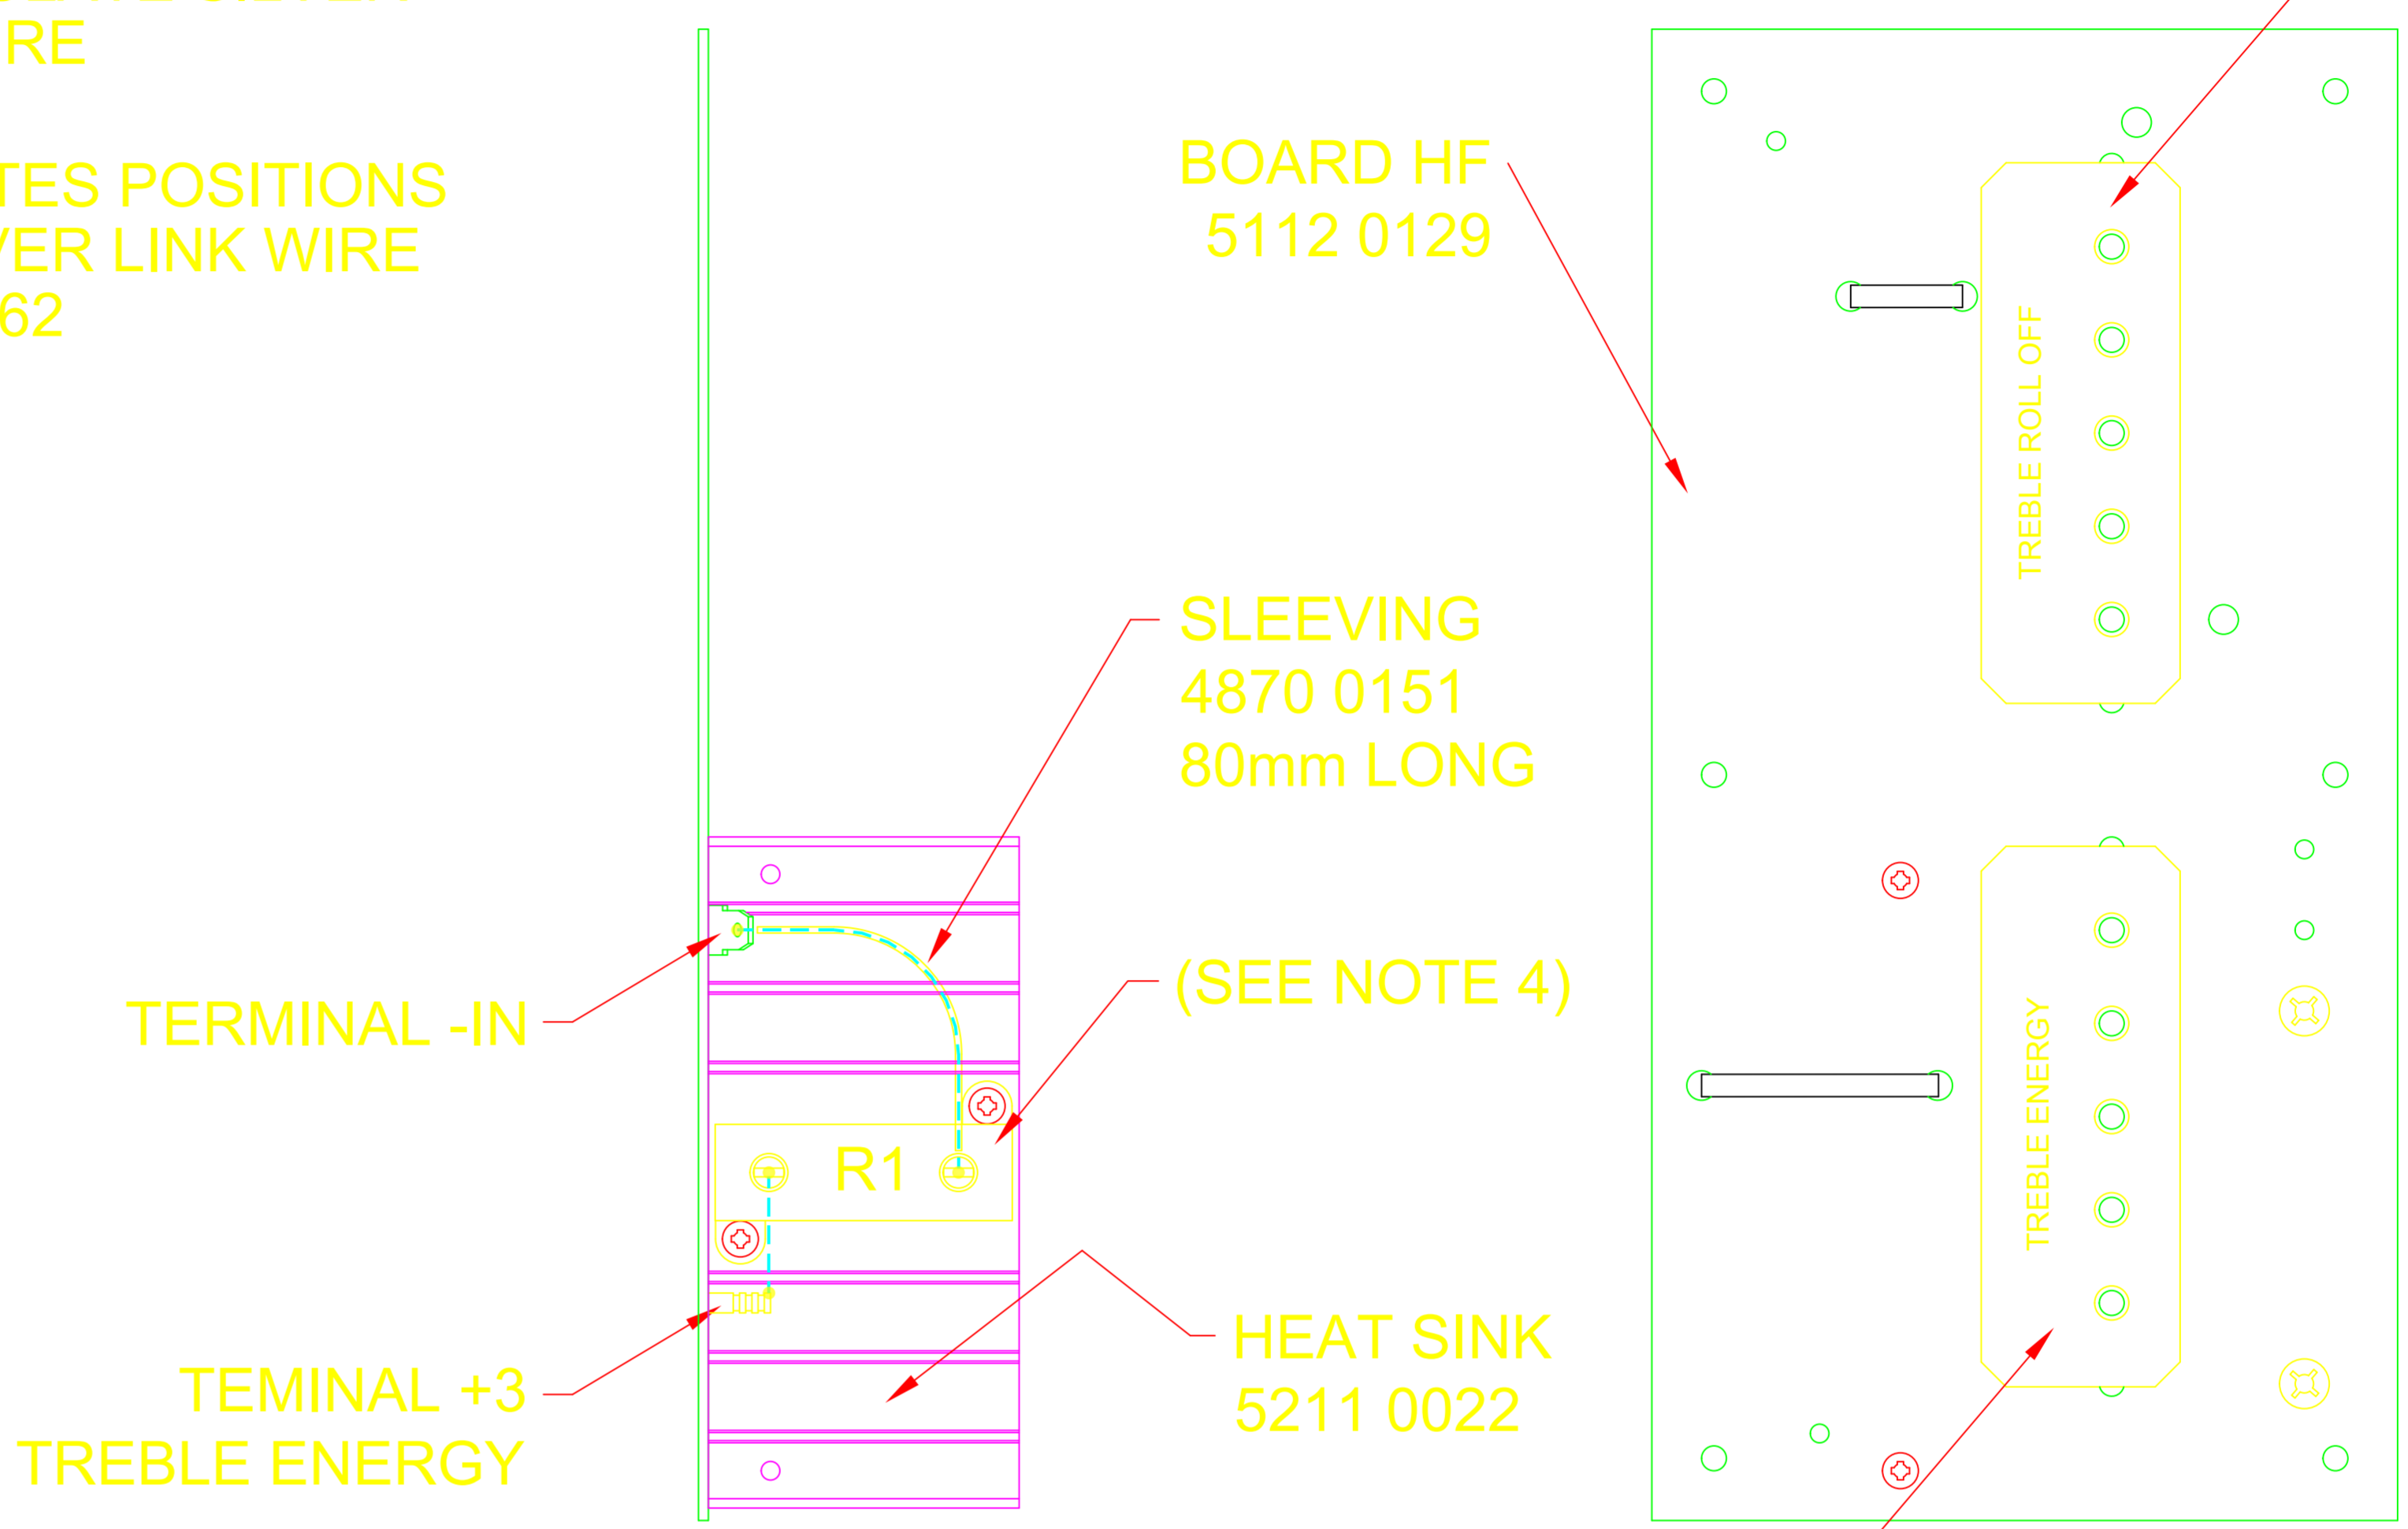



ENSURE ALL FIXING HOLES ARE CLEAR OF COMPONENTS

WIRE CONNECTION DETAIL FOR COMPONENT R1 OTHER COMPONENTS REMOVED FOR CLARITY


R1	47R	50W	2252 0209
R2	10R	50W	2252 0205
R3	22R	50W	2252 0207

C1	6u8	630V	2606 1403
C2	2u2	630V	2606 1394
C3	3u3	160V	2606 0675

T1	MF/HF 5 TAP	7100 0061
----	-------------	-----------

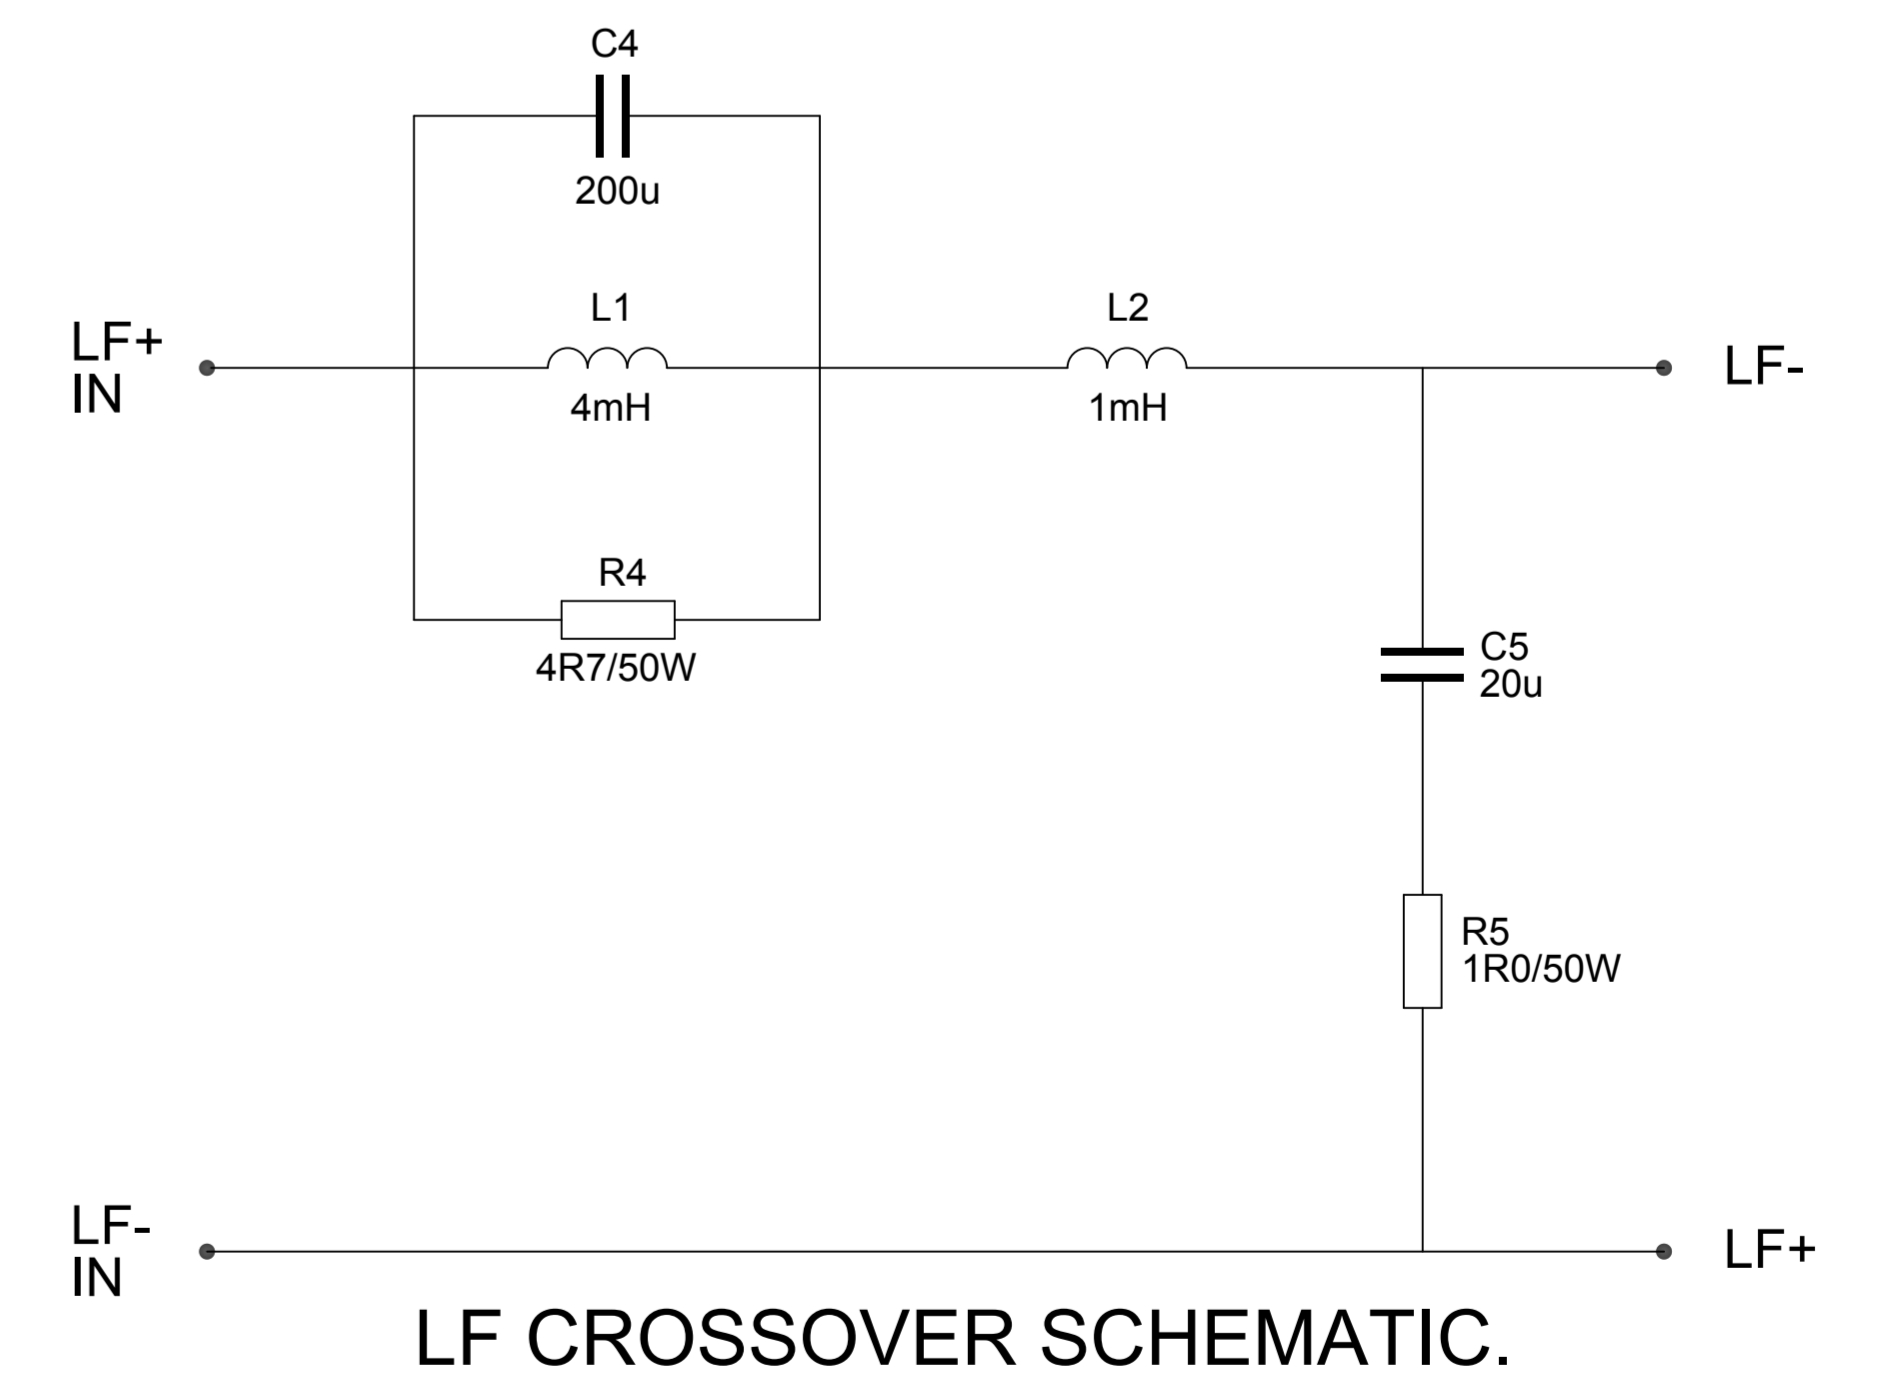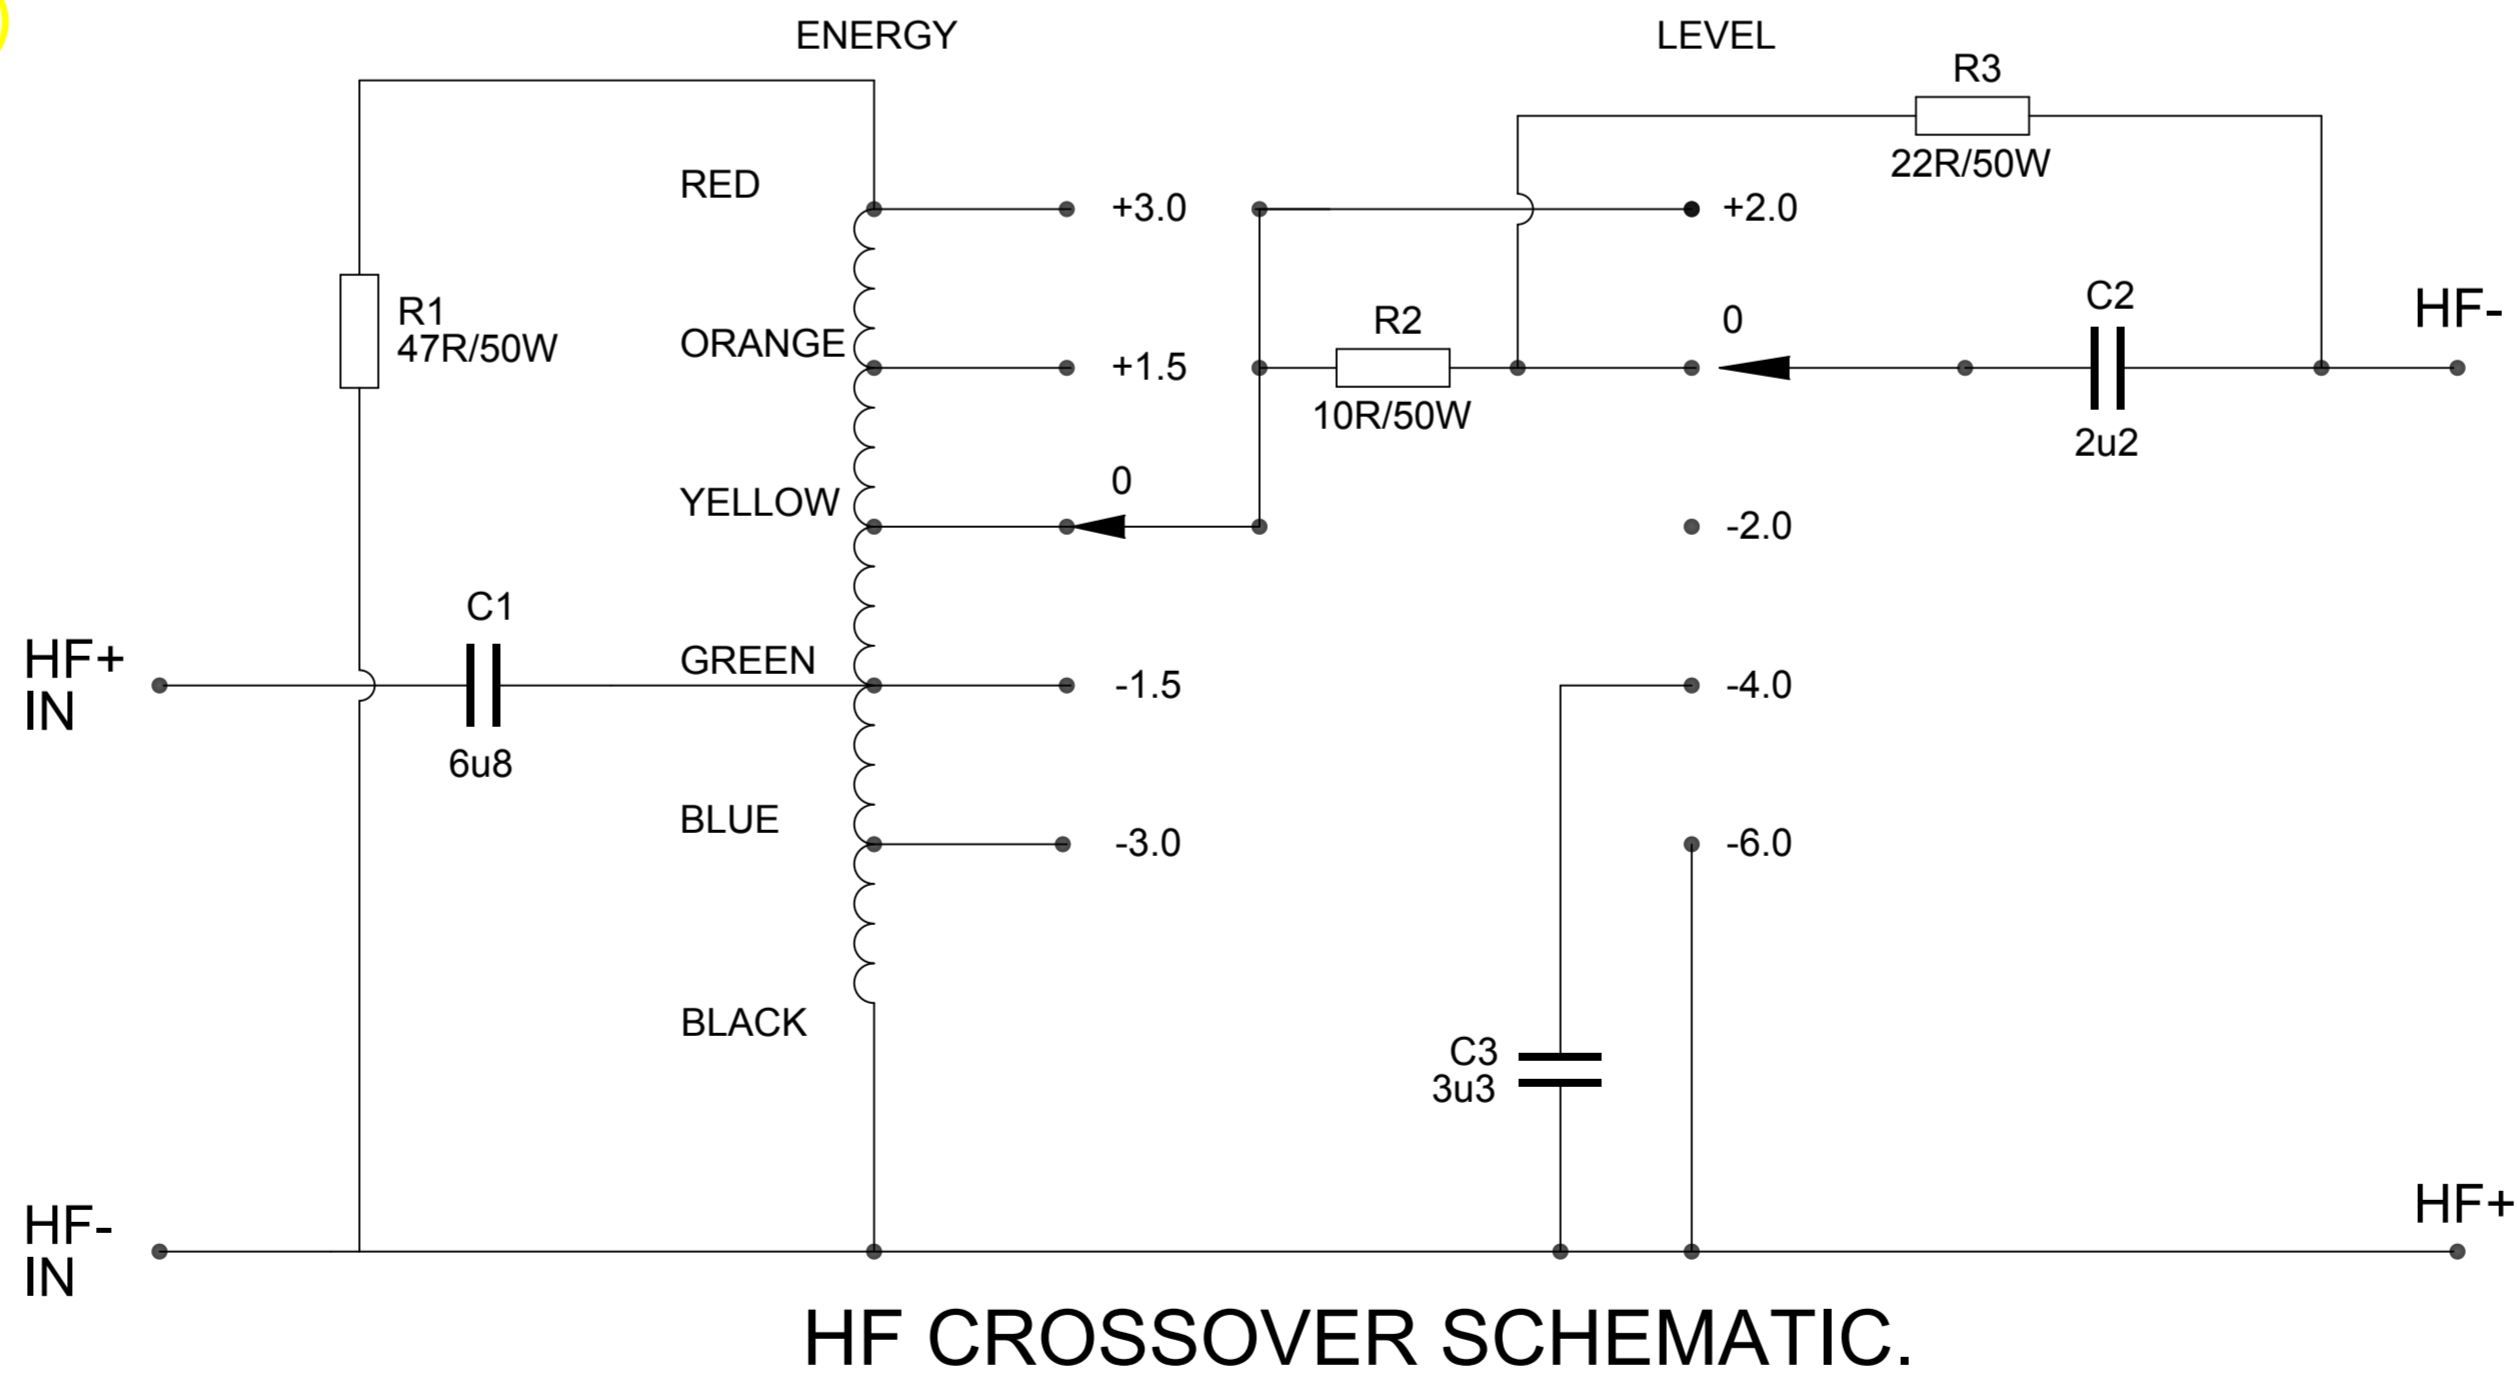

SEE DRAWING 7300 1139 CROSSOVER LF WESTMINSTER ROYAL SE FOR COMPONENT LAYOUT.

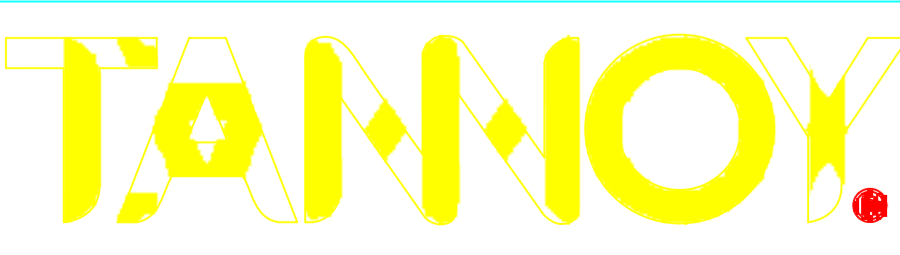

The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published applied or copied without the express knowledge & permission of the owners.

MATERIAL

TITLE CROSSOVER - HF TYPE 1579 WESTMINSTER ROYAL SE

FINISH

CROSSOVER - HF TYPE 1579 WESTMINSTER ROYAL SE

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim.	±0.4mm
Two places of decimal dim.	±0.1mm
Holes 12.0mm dia & under	+0.1 -0.0mm
Holes over 12.0mm dia.	±0.4mm

RoHS Compliant

Drawn
Checked
Approved
Scale

7300 1138