

Service Note		
Product	Description:	Service note no.
EQ Station	Replacing the Host board	770106002

Reason for note:

Guideline for installing the Host board for the EQ-Station.

IMPORTANT:

This replacement should only be carried out by a skilled technician.

PARTLIST:

Stock number	Name	Quantity
601011011	0812- ESD BAG (203x305mm)	1
815030011	X-Wiz Host EQ128K and 4xDSP	1
562000040	M3x6mm PAN,self taping,contact point	1
563040037	2.9x6.5mm FLPX-Z Pozidriv Screw,	10
770106002	Service note no. 770 10 60 02	1

Procedure:

1. TURN OFF POWER AND DISCONNECT POWER CORD.
2. Remove the lid and the back panel, you´ll have to dismount the left and right rack panels.
3. Remove the Host PCB that needs to be replaced from the EQ-Station slot remember to release the screw and cable connector J3, see fig.1.

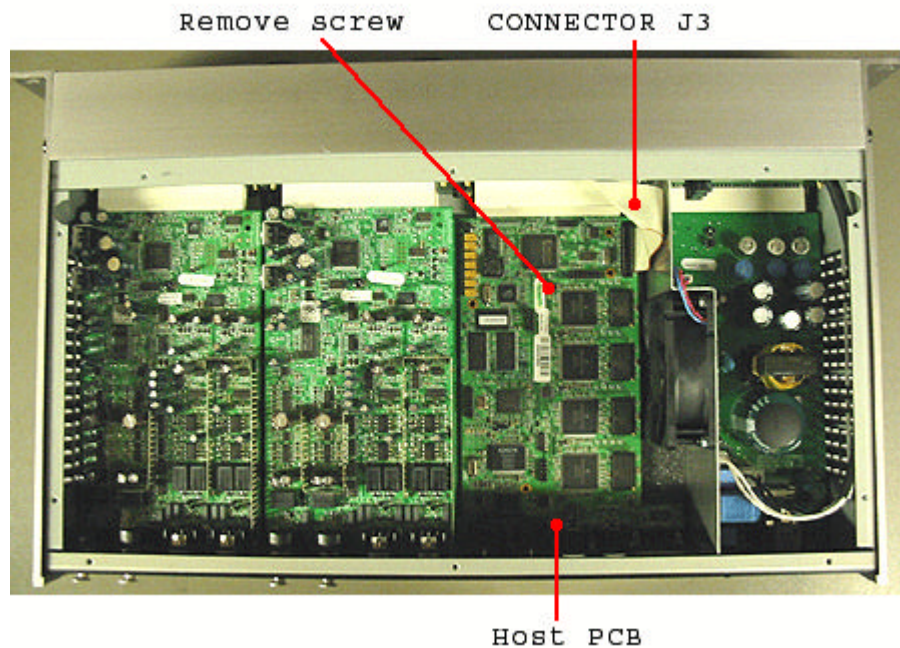


Fig.1

NOTE: Remember to remove the screws and bolts form the Host board before mounting the back panel

Service Note		
Product	Description:	Service note no.
EQ Station	Replacing the Host board	770106002

4. Mount the Host board(**815030011**) into the slot and fastened it with the screw (**562000040**) in the middle and the bus cable connector J3 see fig.1.
5. Connect power cord and signal input. Turn on power. Verify that the unit is OK.
6. Mount the back panel to the unit.

Updating the serial number

1. Connect an Ethernet cable to the unit and power on.
 2. Start the test software for updating the serial number.
- NOTE:** If you do not have this program please contact TC Tec.Servcie.
3. Write **CSH 0 [Frame serial number]** (without the brackets[]) in the command line.
 4. Click **SEND**
 5. Restart the unit.
 6. When you see the serial number in the left corner beside the refresh button then click **UPDATE**.(bin file)
 7. Wait until you see “**succeeded to upload file**” Click **OK** and the **EXIT**.
 8. Restart the unit and wait until the unit has started up properly.
 9. Redo steps 6-8 but upload the MEM file.
 10. Now the unit is updated to our latest software version.
 11. END

If any trouble please contact us at Tech@tcelectronic.com

TC-Electronic support site: <http://tcsupport.custhelp.com/>

Good luck!