

ake Document type:


**Cover mounting Instructions** 

15-10-27	Page 1 of 6	AR
Last modified	Page:	Created by

Cover mounting instruction for all FP-Series and C88:4


Item Number	Item Name	Quantity	Note
FS440x8x6	Foam Sticker 440x8x6mm	1	
INAICO4	Insulation AICO4	1	
INAMA	Insulation Amplifier Module type A	1	
TCA-PBLK	Top cover type A painted black	1	
BCB-PBLK	Bottom Cover Type B Painted Black	1	
SCAFCCMBGD	Sticker Caution Approvals FCC Must Be Grounded Type D	1	This sticker is only for FP+ Series
SCAFCCMBGC	Sticker Caution Approvals FCC Must Be Grounded Type C	1	This sticker is only valid for C88:4

1. Mount the INAMA (insulation) on the TCA-PBLK (top cover) 15mm from the back edge as shown in picture below.

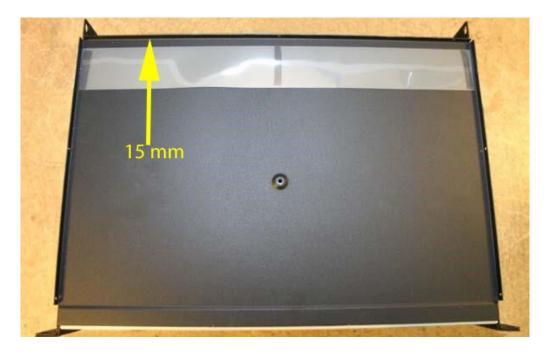


🔊 <b>LAB.</b> GRUPPEN 🔤	e Document type:	Last modified	Page:	Created by
Cover mountin	ng Instructions	15-10-27	Page 2 of 6	AR

2. Mount the sticker SCAFCCMBGD or SCAFCCMBGC (variant dependent) on the TCA-PBLK (top cover) 15mm from the corner edges as shown in the picture below

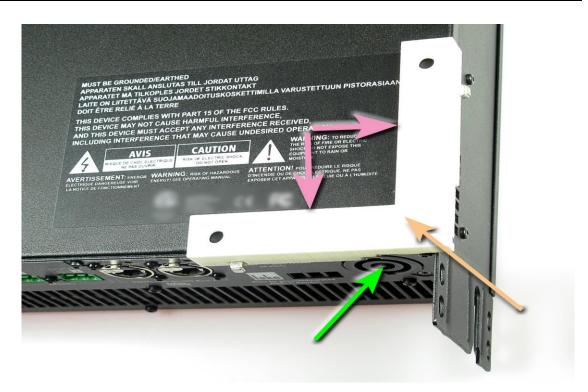

3. Mount the INAICO4 (insulation) and the FS440x8x6 (foam) to the BCB-PBLK (bottom cover) 15mm from the side edges as shown in picture below

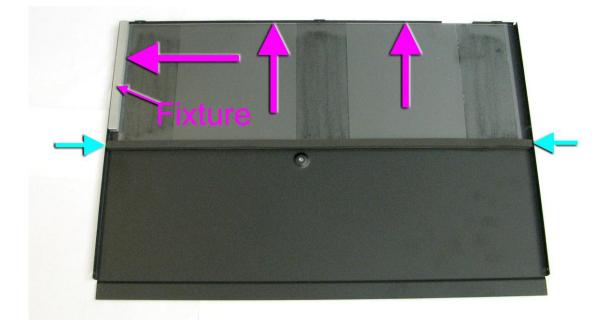




Cover mounting	Instructions	15-10-27	Page 3 of 6	AR
	Document type:	Last modified	Page:	Created by

Cover mounting instructions for C16:4, C28:4, C48:4, C68:4, C5:4X, C10:4X, C10:8X and C20:8X


Item Number	Item Name	Quantity	Note
INAICO4	Insulation AICO4	1	
INAMA	Insulation Amplifier Module type A	1	
TCA-PBLK	Top cover type A painted black	1	
BCB-PBLK	Bottom Cover Type B Painted Black	1	
SCAFCCMBGC	Sticker Caution Approvals FCC Must Be Grounded Type C	1	This sticker is only valid for C5:4X, C10:4X, C10:8X and C20:8X
SCAFCCMBGD	Sticker Caution Approvals FCC Must Be Grounded Type D	1	This sticker is only valid for C16:4, C28:4, C48:4 and C68:4

1. Mount the INAICO4 (insulation) on the BCB-PBLK (bottom cover) 15mm from the side edges as shown in the picture below

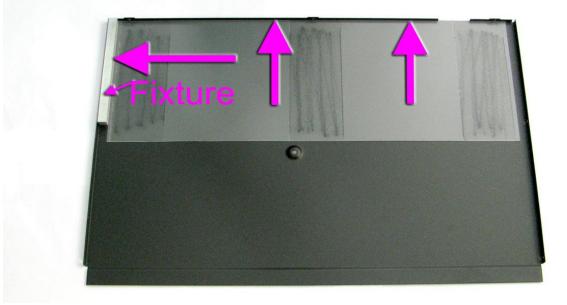

🞯 <b>LAB.</b> GRUPPEN	lake Document type:	Last modified	Page:	Created by
Cover mo	unting Instructions	15-10-27	Page 4 of 6	AR

2. Mount the INAMA (insulation) 15mm from the bottom edge as shown in the picture below

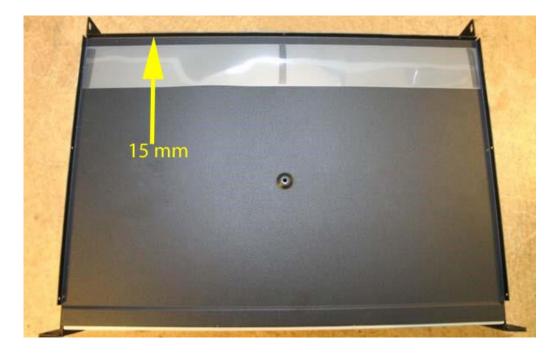

3. Mount the SCAFCCMBGD or the SCAFCCMBGC (variant dependent sticker see the item number) 15mm from the corner edges as shown in picture below





Document type:

Last modified 15-10-27


Page: Created by Page 5 of 6 AR

Cover mounting Instructions for PLM+, D-series Tesira and D-Series lake

**Cover mounting Instructions** 

Item number	Item Name	Quantity	Note
SCAFCCMBGB	Sticker Caution Approvals FCC Must Be Grounded Type B	1	
TCD-PBLK	Top Cover Type D Painted Black	2	
INAICO4	Insulation Aico4	2	

1 Mount the 2 INAICO4 (insulation) the purple insulation should be 15mm from the back edges as show in the picture below

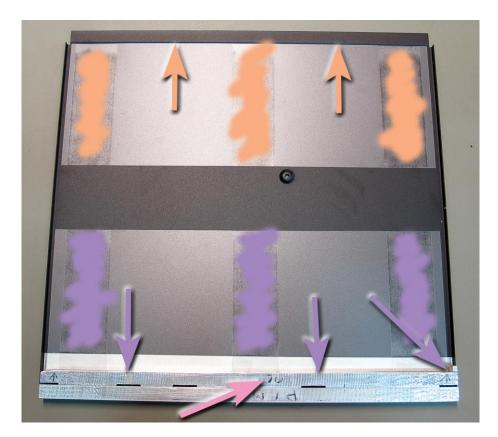



2. Mount the SCAFCCMBGB (sticker) 15mm from the corner edges as shown in the picture below

