


THIRD ANGLE PROJECTION

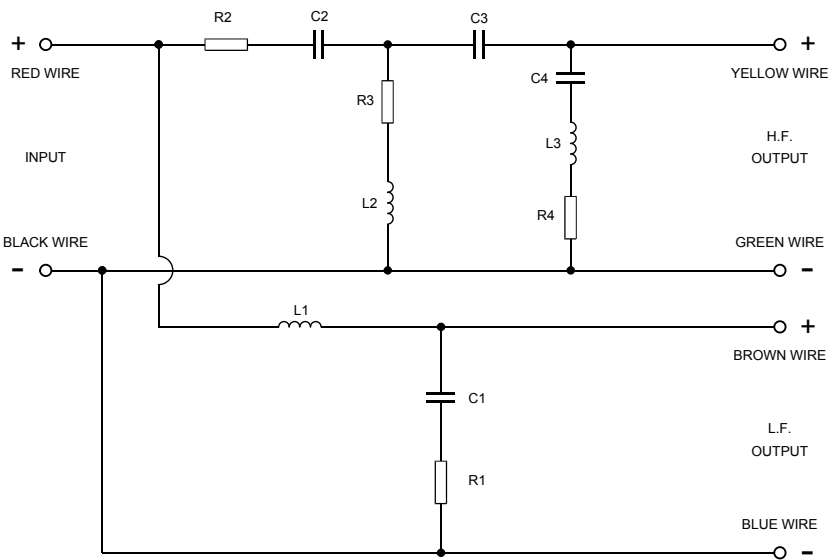

R1	1R5	5W	±5%	CERAMIC WOUND
R2	4R7	5W	±5%	CERAMIC WOUND
R3	10R0	10W	±5%	CERAMIC WOUND
R4	8R2	5W	±5%	CERAMIC WOUND
C1	6.8uF	100V	±5%	MKT
C2	2.7uF	100V	±5%	MKT
C3	2.2uF	100V	±5%	MKT
C4	0.39uF	100V	±5%	MKT
L1	1.5mH	DCR 0R4	±5%	LAM IRON CORE, Ø1.0mm
L2	0.45mH	DCR 0R5	±5%	AIR CORE, Ø0.5mm
L3	0.40mH	DCR 0R5	±5%	AIR CORE, Ø0.5mm

NOTE:

1. ALL WIRES HIGH PURITY OFC (16/0.2)
2. ENSURE COMPONENTS ARE SECURED TO PCB.
3. ALL ELECTRICAL CONNECTIONS TO BE SOLDERED.
4. ENSURE ALL COMPONENTS ARE WITHIN PCB BOARD.
5. PCB MATERIAL FIBREGLASS FR4 1.6mm THICK.
6. PCB COPPER FOIL 1oz.
7. BULB TO FIXED TO THE BOARD WITH SILICONE ADHESIVE.

SEE TRANSFORMER WIRING DETAIL AT THE RIGHT OF DRAWING SHEET.

Part No.
7300 1460/1461

First used on
AMS 6 DC

Issues
A 14/08/14 MP

TANNOY.

The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published, applied or copied without the express knowledge & permission of the owners.

MATERIAL

FINISH

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim.

Two places of decimal dim.

Holes 12.0mm dia & under

Holes over 12.0mm dia.

RoHS Compliant

Drawn

Checked

Approved

Scale NTS

TITLE CROSSOVER TYPE 1802/1803 - FOR AMS 6DC

A2

7300 1460/1461