


THIRD ANGLE PROJECTION

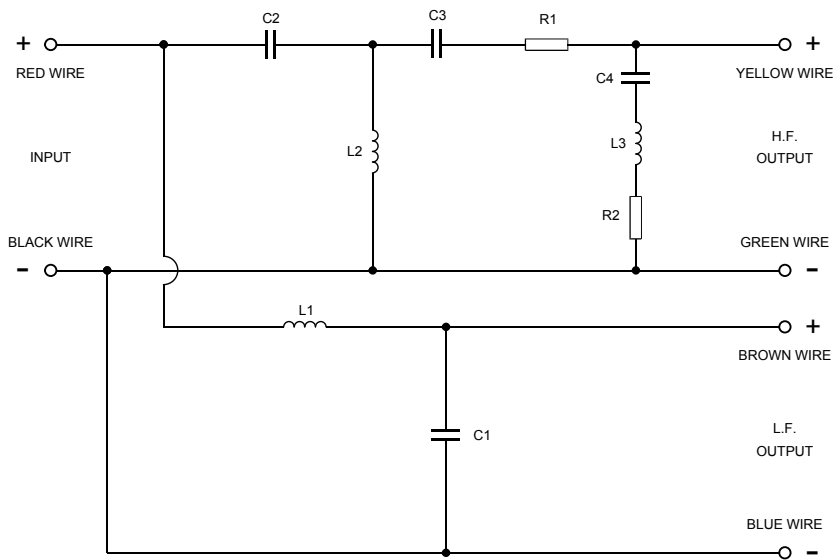

R1	8R2	10W	±5%	CERAMIC WOUND
R2	4R7	5W	±5%	CERAMIC WOUND
C1	6.8uF	100V	±5%	MKT
C2	2.2uF	100V	±5%	MKT
C3	5.6uF	100V	±5%	MKT
C4	2.2uF	100V	±5%	MKT
L1	2.3mH	DCR 0R4	±5%	LAM IRON CORE, Ø1.0mm
L2	0.8mH	DCR 0R6	±5%	LAM IRON CORE, Ø0.5mm
L3	1.0mH	DCR 0R5	±5%	LAM IRON CORE, Ø0.5mm

NOTE:

1. ALL WIRES HIGH PURITY OFC (16/0.2)
2. ENSURE COMPONENTS ARE SECURED TO PCB.
3. ALL ELECTRICAL CONNECTIONS TO BE SOLDERED.
4. ENSURE ALL COMPONENTS ARE WITHIN PCB BOARD.
5. PCB MATERIAL FIBREGLASS FR4 1.6mm THICK.
6. PCB COPPER FOIL 1oz.
7. BULB TO FIXED TO THE BOARD WITH SILICONE ADHESIVE.

SEE TRANSFORMER WIRING DETAIL AT THE RIGHT OF DRAWING SHEET.

Part No.
7300 1464/1465

First used on
AMS 8 DC

Issues
A 14/08/14 MP

TANNOY.

The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published, applied or copied without the express knowledge & permission of the owners.

MATERIAL

FINISH

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim. Drawn

Two places of decimal dim. Checked

Holes 12.0mm dia & under Approved

Holes over 12.0mm dia. Scale NTS

RoHS Compliant

TITLE CROSSOVER TYPE 1806/1807 - FOR AMS 8DC

A2

7300 1464/1465