


# SCHEMATIC DIAGRAM

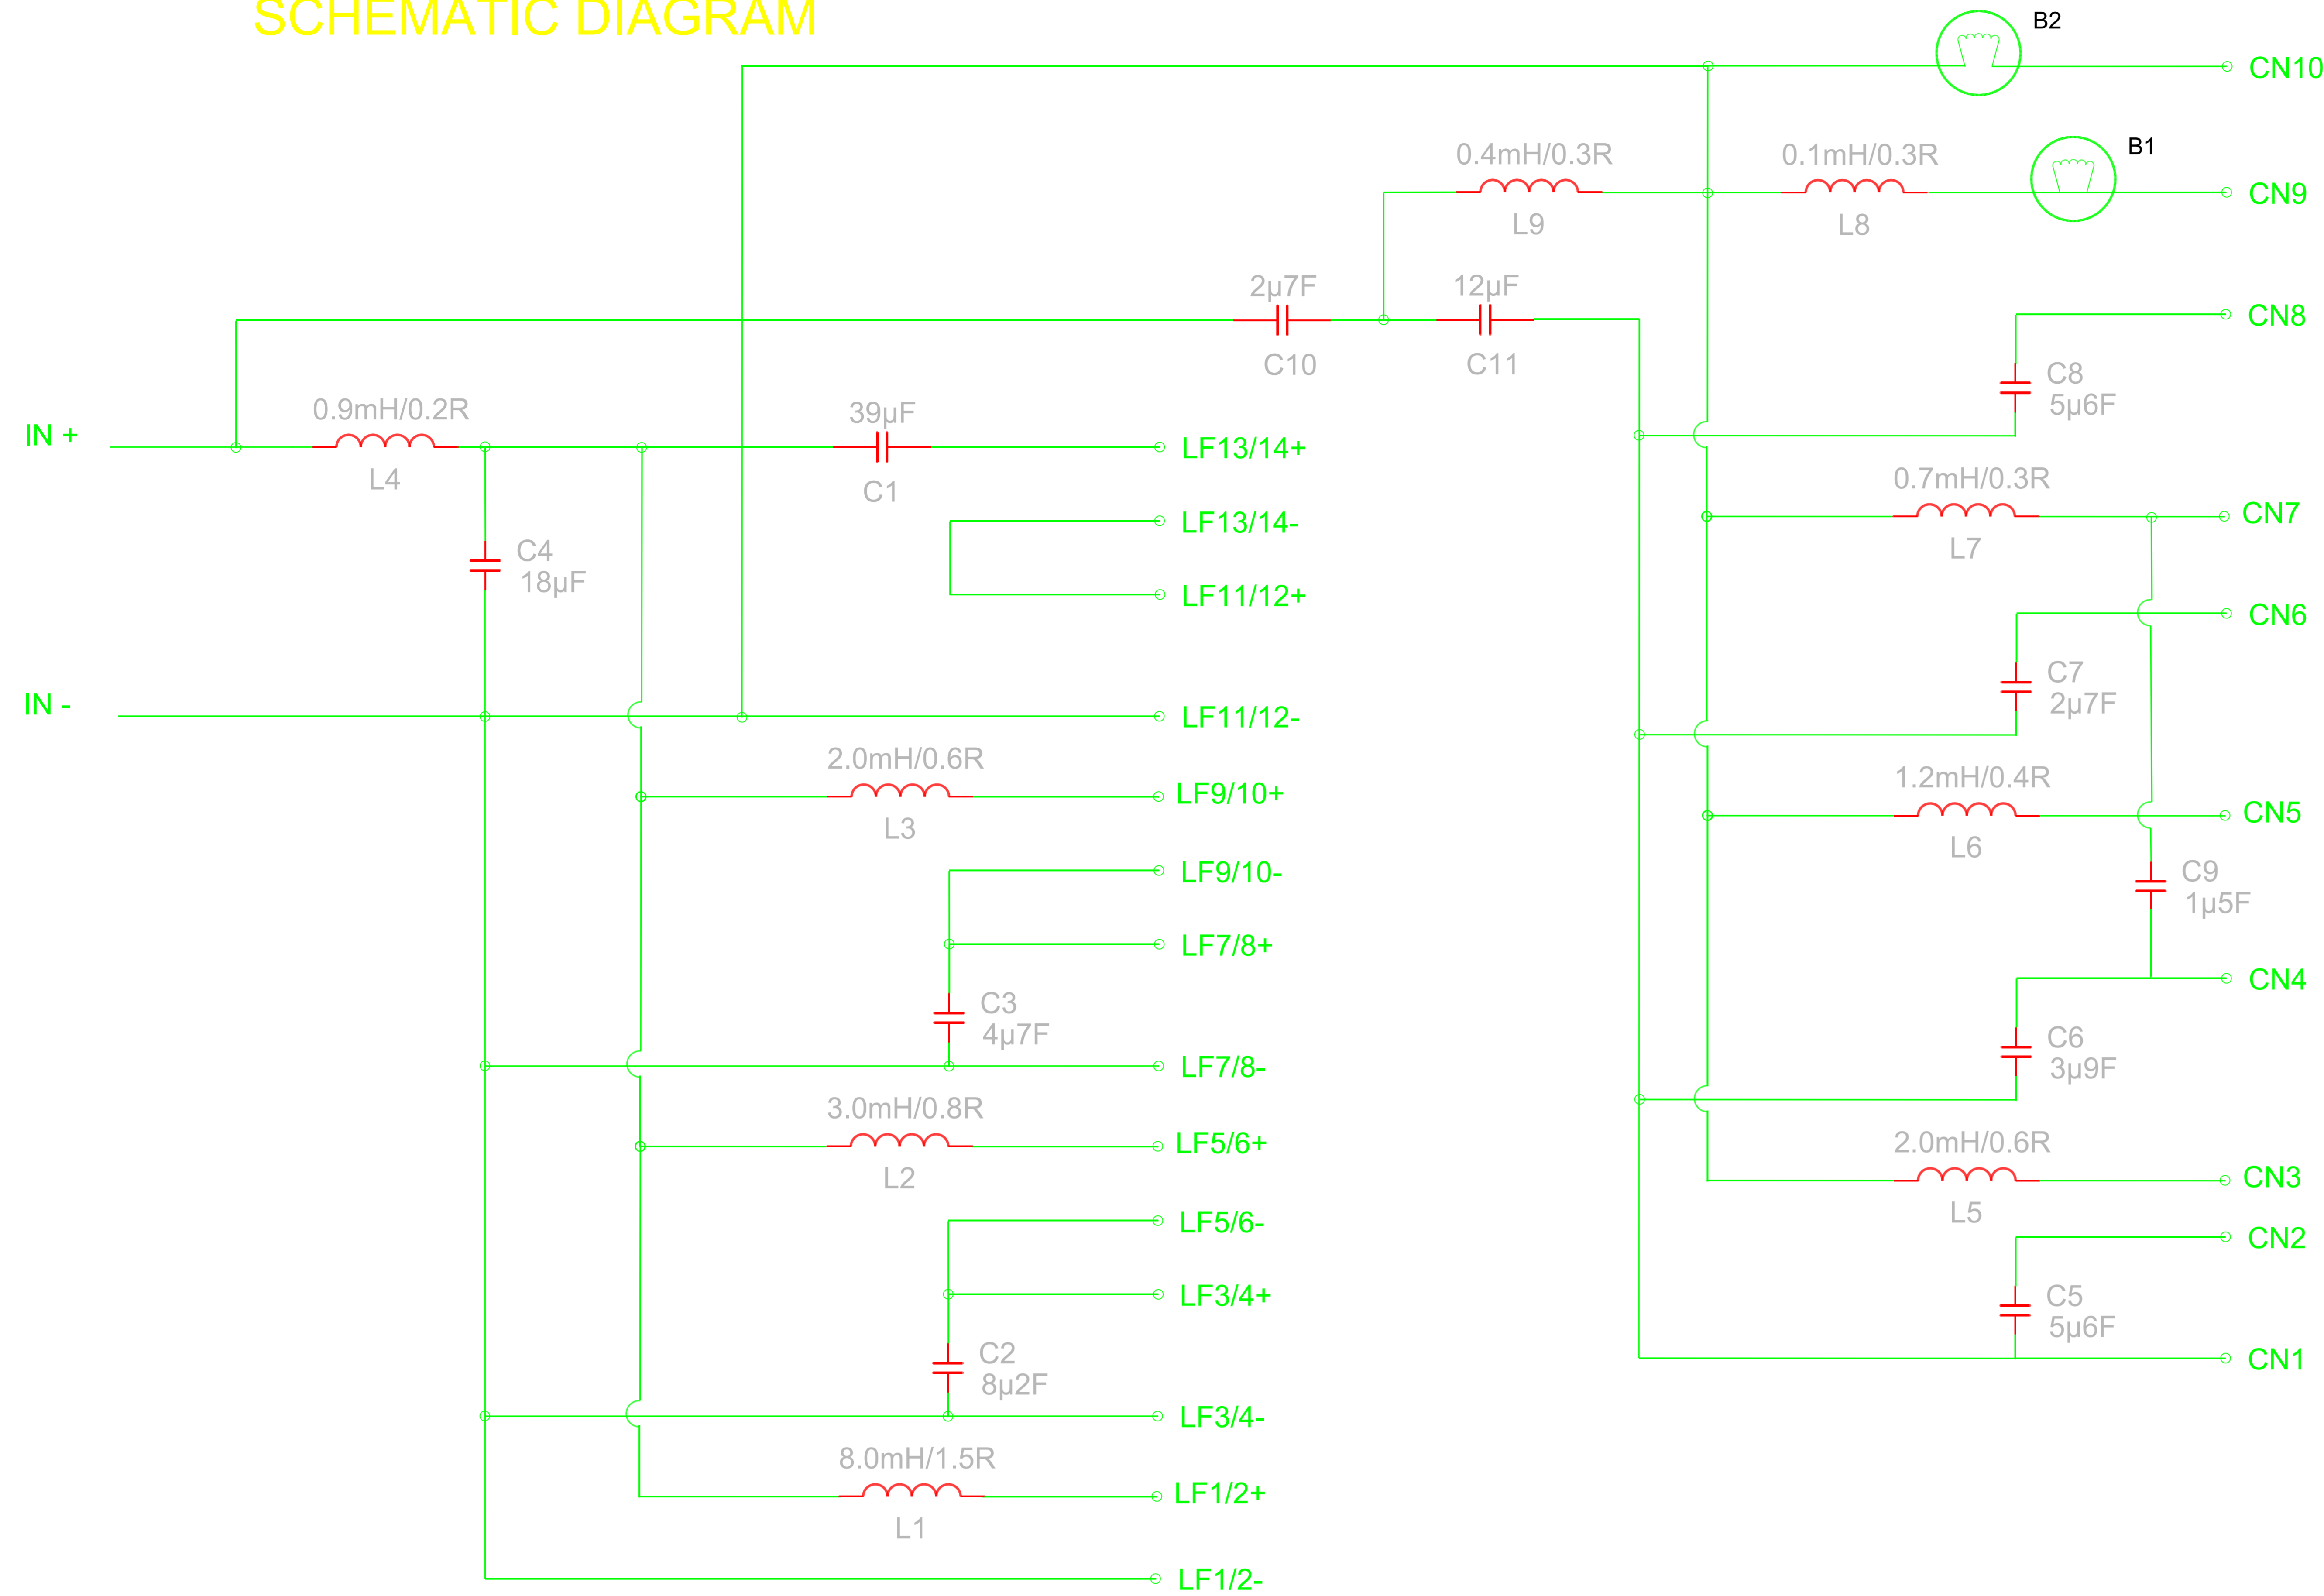

SUBJECT TO SAMPLE APPROVAL BY TANNOY

LAMINATED CORE INDUCTORS :  
 L1-L3 : L48x8x8mm  
 L4: L57x10x10mm  
 L5-L7 : L41x8x8mm

ITEM	DESCRIPTION	QTY	
COIL	L1	8.0mH/5% LAMINATED IRON CORE 8x8, DCR≤1.5 OHM	1
	L2	3.0mH/5% LAMINATED IRON CORE 8x8, DCR≤0.8 OHM	1
	L3	2.0mH/5% LAMINATED IRON CORE 8x8, DCR≤0.6 OHM	1
	L4	0.9mH/5% LAMINATED IRON CORE 8x8, DCR≤0.2 OHM	1
	L5	2.0mH/5% LAMINATED IRON CORE 6x8, DCR≤0.6 OHM	1
	L6	1.2mH/5% LAMINATED IRON CORE 6x8, DCR≤0.4 OHM	1
	L7	0.7mH/5% LAMINATED IRON CORE 6x8, DCR≤0.3 OHM	1
	L8	0.1mH/5% AIR CORE, DCR≤0.3 OHM	1
	L9	0.4mH/5% AIR CORE, DCR≤0.3 OHM	1
CAPACITOR	C1	39uF MKT, 100Vdc, 5%	1
	C2	8u2F MKT, 100Vdc, 5%	1
	C3	4u7F MKT, 100Vdc, 5%	1
	C4	18uF MKT, 100Vdc, 5%	1
	C5	5u6F MKT, 100Vdc, 5%	1
	C6	3u9F MKT, 100Vdc, 5%	1
	C7	2u7F MKT, 100Vdc, 5%	1
	C8	5u6F MKT, 100Vdc, 5%	1
	C9	1u5F MKT, 100Vdc, 5%	1
	C10	2u7F MKT, 100Vdc, 5%	1
	C11	12uF MKT, 100Vdc, 5%	1
LIGHT BULB	B1	24V / 35W	1
	B2	24V / 35W	1

FOR ESTIMATING PURPOSES ONLY  
 NO TOOLING OR PRODUCTION  
 PARTS TO BE MADE TO THIS  
 DRAWING

Part No.	7300 1373
First used on	VLS 30
Issues	A 16/11/11 MS
	B 16/05/12 MS LAMINATED CORE SIZE OF INDUCTORS CHANGED, L4 WAS DCR<0.3



The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published, applied or copied without the express knowledge & permission of the owners.

MATERIAL	
TITLE	CROSSOVER - TYPE 1740 - VLS 30

FINISH	
ALL DIMENSIONS IN MILLIMETRES	
Limits of tolerance unless stated:	
One place of decimal dim.	Drawn
Two places of decimal dim.	Checked
Holes 12.0mm dia. & under	Approved
Holes over 12.0mm dia.	Scale

RoHS Compliant	
A1	7300 1373