


SCHEMATIC DIAGRAM

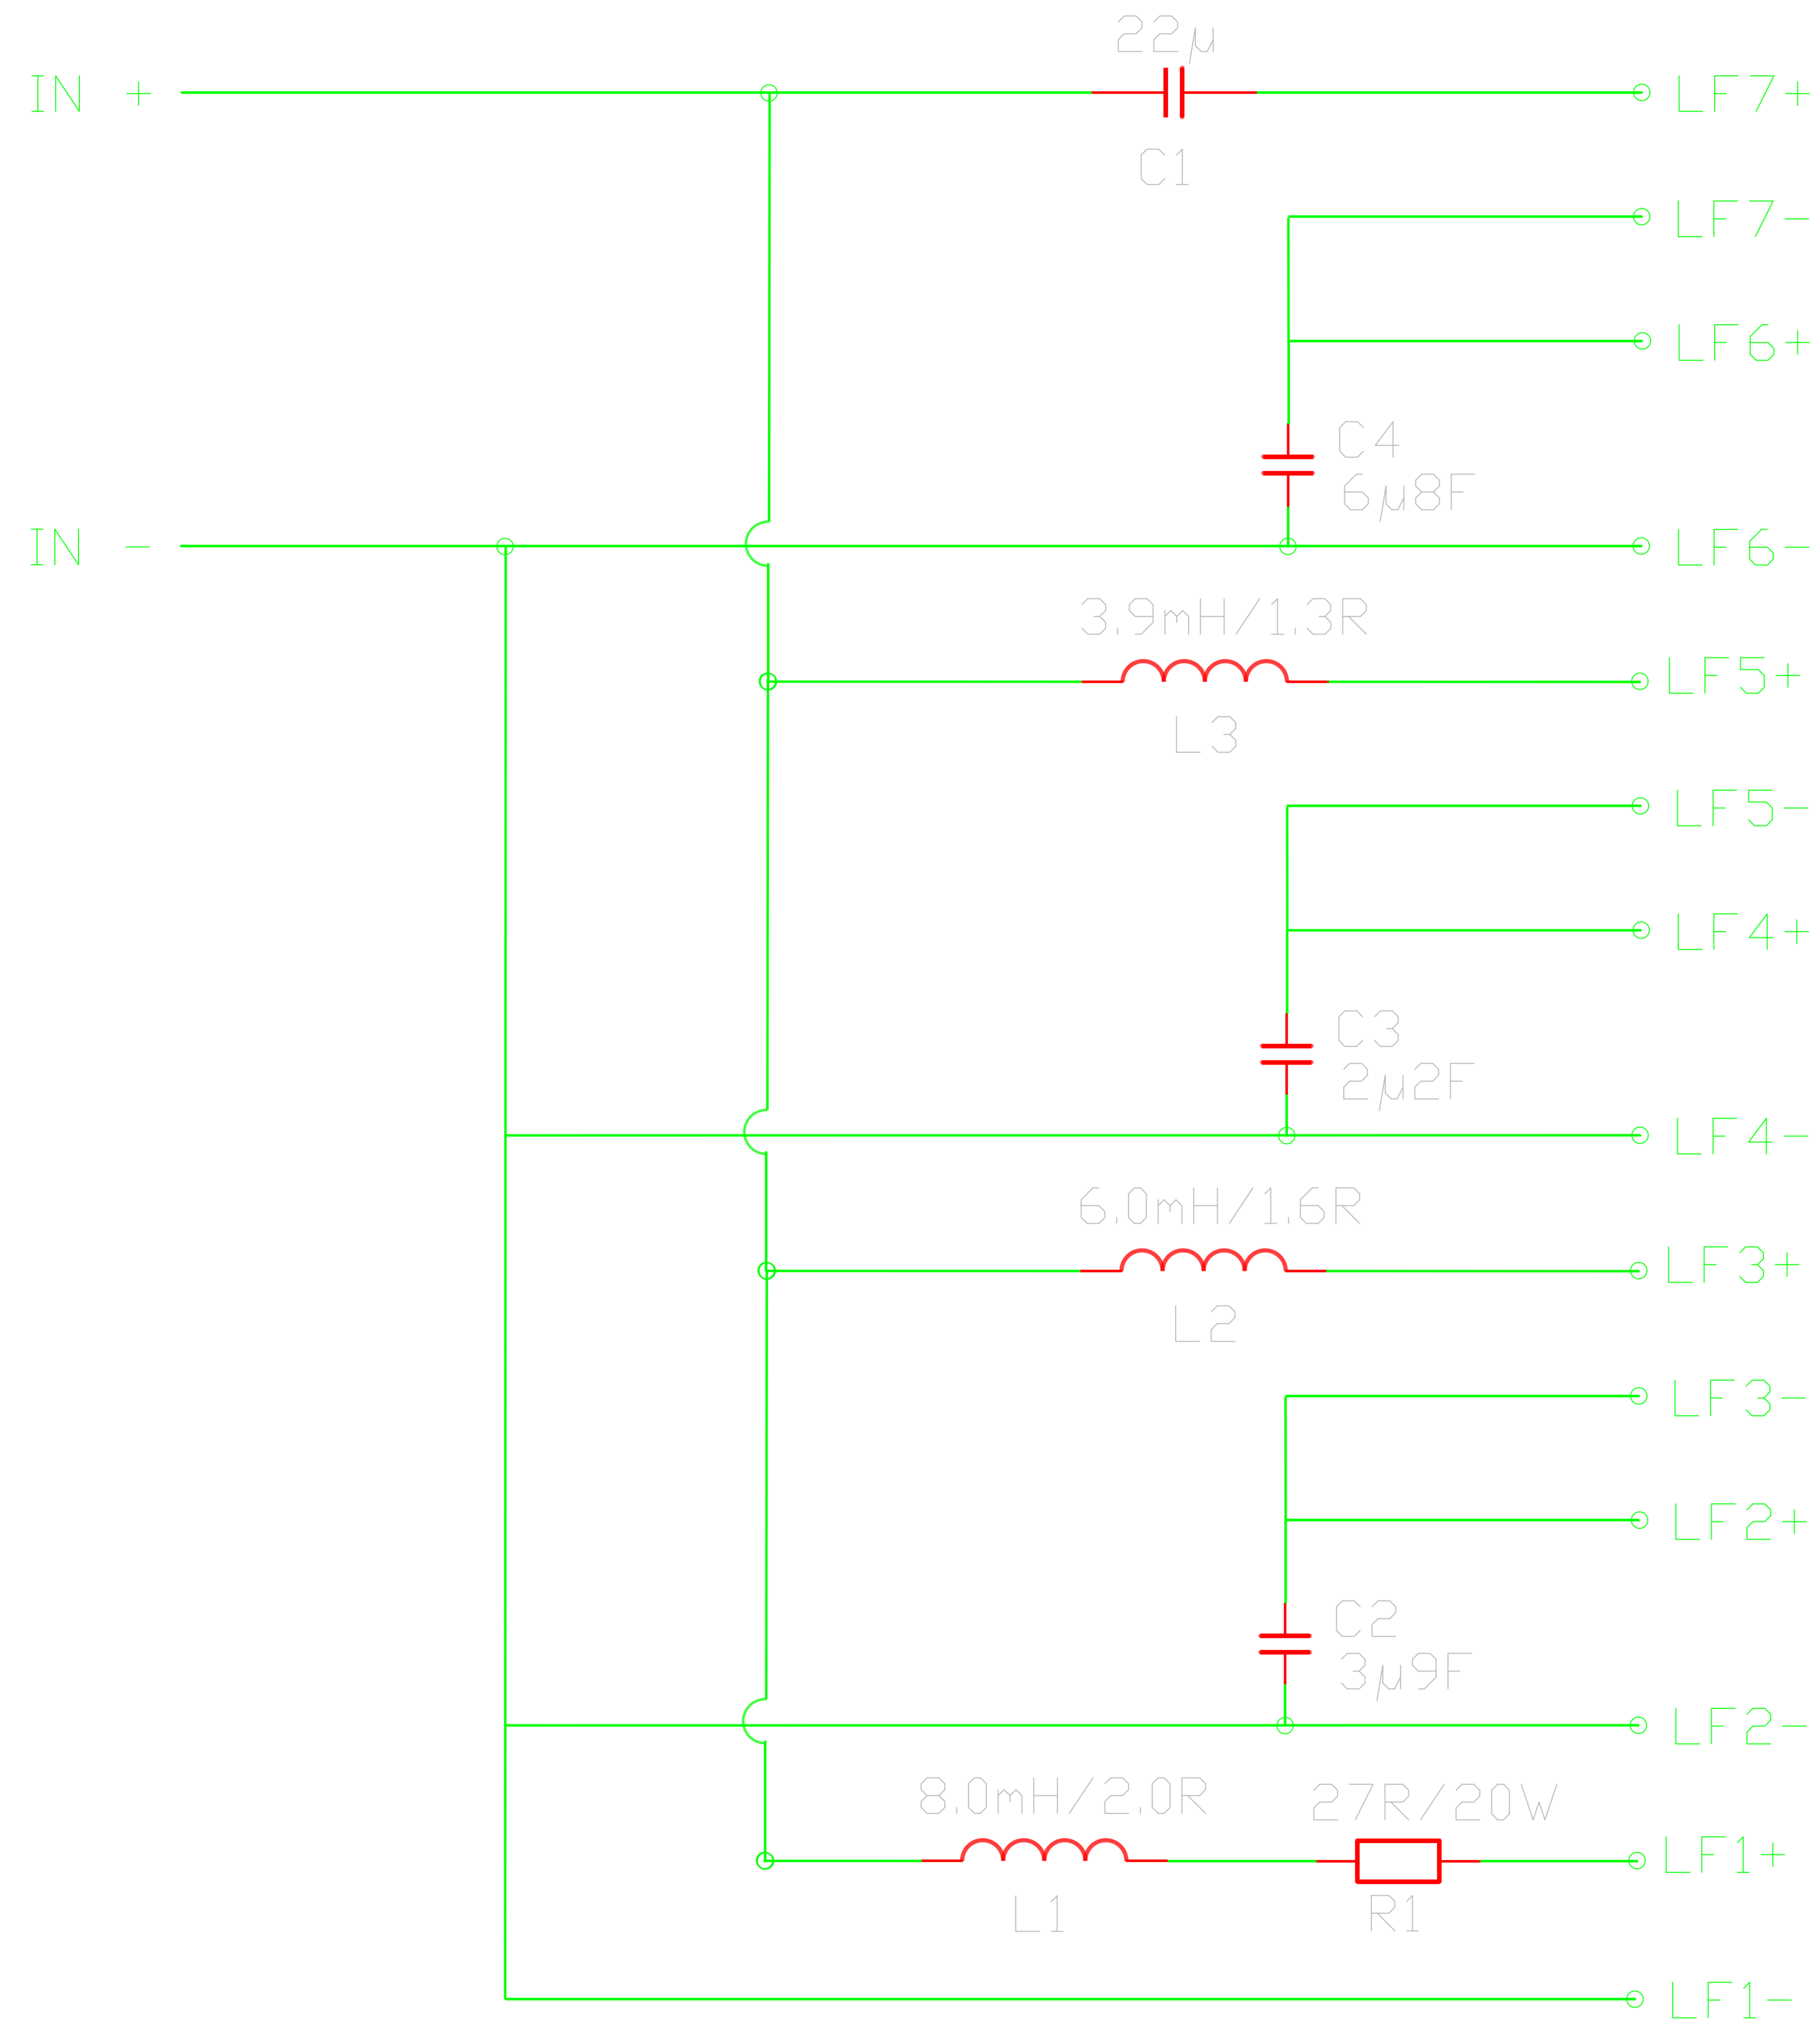


ITEM		DESCRIPTION	QTY
COIL	L1	8.0mH/5% LAMINATED IRON CORE, DCR<2.0 OHM	1
	L2	6.0mH/5% LAMINATED IRON CORE, DCR<1.6 OHM	1
	L3	3.9mH/5% LAMINATED IRON CORE, DCR<1.3 OHM	1
CAPACITOR	C1	22uF MKT, 100Vdc/5%	1
	C2	3u9F MKT, 100Vdc, 5%	1
	C3	2u2F MKT, 100Vdc, 5%	1
	C4	6u8F MKT, 100Vdc, 5%	1
RESISTOR	R1	27R/20W CERAMIC WIREWOUND 10%	1

LAMINATED CORE INDUCTORS : ALL L41x6x6mm

SUBJECT TO SAMPLE APPROVAL BY TANNOY

FOR ESTIMATING PURPOSES ONLY
NO TOOLING OR PRODUCTION
PARTS TO BE MADE TO THIS
DRAWING

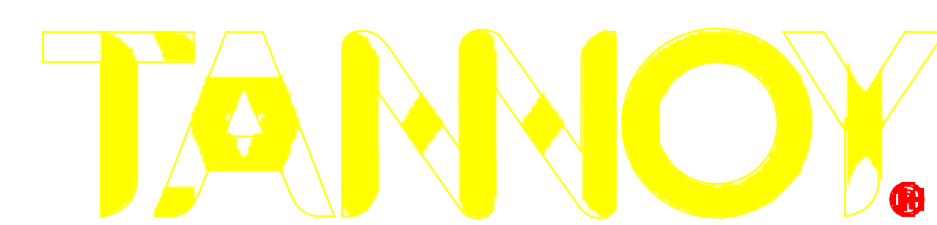

The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published applied or copied without the express knowledge & permission of the owners.

MATERIAL

FINISH

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim.

Two places of decimal dim.

Holes 12.0mm dia & under

Holes over 12.0mm dia.

RoHS Compliant

Drawn

Checked

Approved

Scale

TITLE CROSSOVER - TYPE 1738 - VLS 7

A2

7300 1371