

THIRD ANGLE PROJECTION




\*\*\*PRINT PRODUCT NAME AND TYPE NUMBER ON BOARD\*\*\*


INDICATES POSITIONS OF SLEEVING 4870 0151 REQUIRED TO INSULATE SILVER LINK WIRE

INDICATES POSITIONS OF SILVER LINK WIRE 1134 6062

SILVER WIRE	SLEEVING
A 100mm	A 75mm
B 100mm	B 75mm
C 40mm	C 40mm
D 50mm	D 40mm
E 40mm	E 40mm
F 30mm	F 40mm
G 30mm	G 40mm
H 30mm	H 40mm

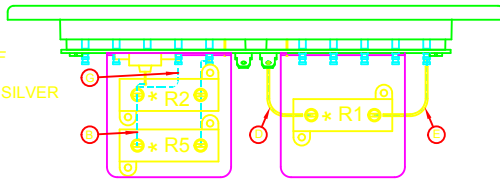

WIRE CONNECTION DETAIL FOR COMPONENTS R1,R2,R5 WITH OTHER COMPONENTS REMOVED FOR CLARITY.

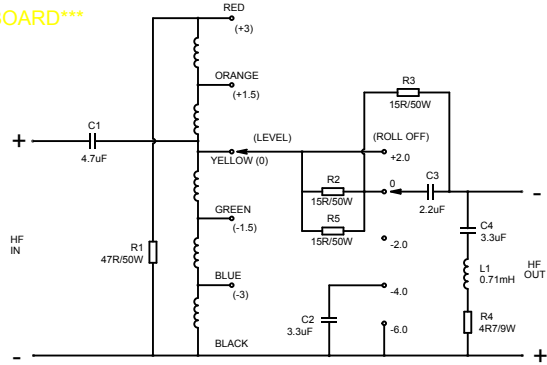

PART No.

7300 1180

First used on

KENSINGTON SE

Issues

A	16.10.06	BM
1	16.10.06	BM
2	15.01.07	BM
	SLEEVING	WAS 4870 0160
		CR8637
3	10.09.09	MS
	LAYOUT	ALTERED
		CR8762

SECURE WITH HOTMELT (4)

BOARD  
5112 0067


SCREW  
4300 4042

CABLE TIE  
4800 0070 (2)

RIVIT 3mm  
4025 0000(8)

R1	47R	50W	2252 0209
R2	15R	50W	2252 0206
R3	15R	50W	2252 0206
R4	4R7	9W	2252 3178
R5	15R	50W	2252 0206

LEAD ASSEMBLY  
7500 0590




TRIM PANEL ASSY  
4940 0018

PUSH ON FIX  
4720 0004(4)

BRACKETS  
5470 0107(2)  
(SEE NOTE 5)

TERMINAL GOLD  
4783 0408(4)

ENSURE ALL FIXING  
HOLES ARE CLEAR  
OF COMPONENTS.



NOTES

1. ENSURE ALL COMPONENTS AND WIRES ARE SECURELY FIXED IN PLACE USING HOTMELT, WITH DESCRIPTIONS VISIBLE.
2. ALL ELECTRICAL CONNECTIONS TO BE SOLDERED.
3. ADHESIVE SEALANT (BLACK TITE) TO BE USED TO SECURE COMPONENTS R1, R2, R3, R5 - \*
4. USE SILVER LINK WIRE WHERE REQUIRED ENSURING THEY ARE SECURELY FIXED IN POSITION.
5. BRACKETS SECURELY FIXED TO BOARD WITH RIVITS INSERTED FROM THE BOTTOM SURFACE OF BOARD.

C1	4u7	100V	2606 1399
C2	3u3	160V	2606 0675
C3	2u2	100V	2606 1394
C4	3u3	160V	2606 0675

L1	0.7mH BOBBIN AIR	7100 0066
----	------------------	-----------

T1	TRANSFORMER	7100 0061
----	-------------	-----------

**TANNOY**

The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published applied or copied without the express knowledge & permission of the owners.

MATERIAL

FINISH

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim.	±0.4mm	Drawn
Two places of decimal dim.	±0.1mm	Checked
Holes 12.0mm dia. & under	+0.1-0.0mm	Approved
Holes over 12.0mm dia.	±0.4mm	Scale 1:2

TITLE CROSSOVER ASSEMBLY HF - TYPE 1605 KENSINGTON SE

A3

7300 1180

RoHS Compliant