


THIRD ANGLE PROJECTION



PRINT PRODUCT NAME AND TYPE NUMBER ON BOARD

INDICATES POSITIONS OF SLEEVING 4870 0151 REQUIRED TO INSULATE SILVER LINK WIRE

INDICATES POSITIONS OF SILVER LINK WIRE 1134 6062

BRACKET 5470 0107

CABLE TIE 4800 0070 (2)

ENSURE ALL FIXING HOLES ARE CLEAR OF COMPONENTS.

SCREW 4510 0001 (17)

LEAD ASSY 7500 0747

TERMINAL GOLD 4783 0408(15)

SCREW 4510 0006 (3)

WIRE TO BE INSULATED USING SLEEVING 4870 0150

WIRE CONNECTION DETAILS FOR COMPONENTS R1 AND R2 WITH OTHER COMPONENTS REMOVED FOR CLARITY

TO HF - IN

TO HF - OUT

TO TERMINAL TAG 1

TO T1 BLACK

TO TERMINAL TAG 6

TO C2

TO C2

TO C4

LEAD ASSY 7500 0732


BOARD 5112 0158

R1	47R	50W	2252 0209
R2	6R8	50W	2252 0212
R3	15R	9W	2252 3190

C1	5u6	630V	2606 1401
C2	0.33u	630V	2606 1406
C3	1u3	1000V	7100 0109
C4	1u5	160V	2606 0650
C5	0.47u	160V	2606 0666
C6	0.68u	160V	2606 0667
C7	1u0	160V	2606 0651

L1	2.7mH AIR CORE	7100 0208
----	----------------	-----------

T1	TRANSFORMER	7100 0061
----	-------------	-----------

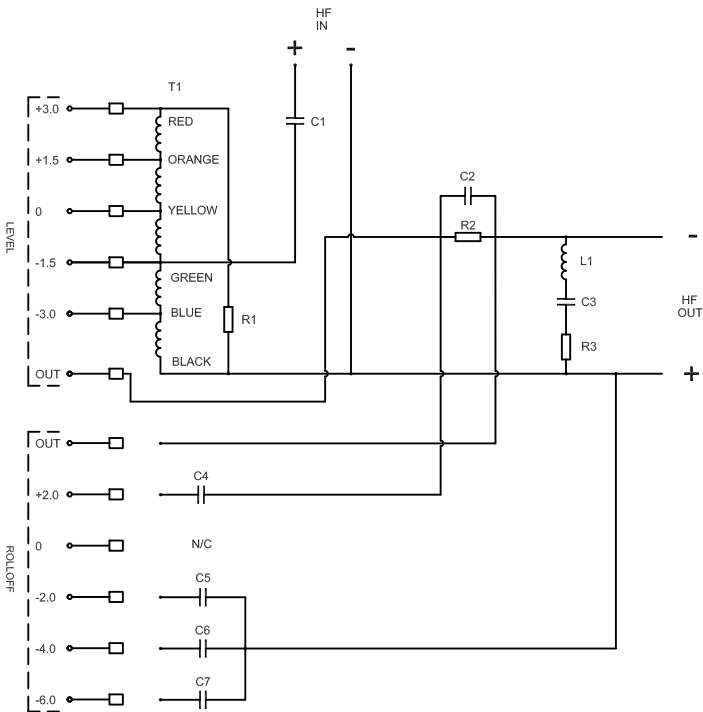

- NOTES:
1. ENSURE ALL COMPONENTS AND WIRES ARE SECURELY FIXED IN PLACE USING BLACKTITE, WITH DESCRIPTIONS VISIBLE.
 2. ALL ELECTRICAL CONNECTIONS TO BE SOLDERED.
 3. USE SILVER LINK WIRE WERE REQUIRED ENSUREING THEY ARE SECURELY FIXED IN POSITION.

PART No. 7300 1393		
First used on CANTERBURY GR		
Issues A 11.09.12 MP		
B 16.07.13 MP		
R2 PART NUMBER CHANGED 2252 0212 WAS 2252 0211		

TANNOY.

The contents, information and copyright of this document are the sole property of Tannoy Ltd and must not be published applied or copied without the express knowledge & permission of the owners.

MATERIAL

FINISH

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim. ±0.4mm

Two places of decimal dim. ±0.1mm

Holes 12.0mm dia. & under +0.1-0.0mm

Holes over 12.0mm dia. ±0.4mm

RoHS Compliant

Drawn

Checked

Approved

Scale NTS

TITLE CROSSOVER - TYPE 1753 CANTERBURY GR HF

CROSSOVER - TYPE 1753 **A3**

7300 1393