


THIRD ANGLE PROJECTION




PRINT PRODUCT NAME AND TYPE NUMBER ON BOARD


INDICATES POSITIONS OF
SLEEVING 4870 0150
REQUIRED TO INSULATE SILVER
LINK WIRE

INDICATES POSITIONS
OF SILVER LINK WIRE
1134 6062

WIRE CONNECTION DETAILS FOR
COMPONENTS R1, R2, R3, R5 AND C2
WITH OTHER COMPONENTS
REMOVED FOR CLARITY

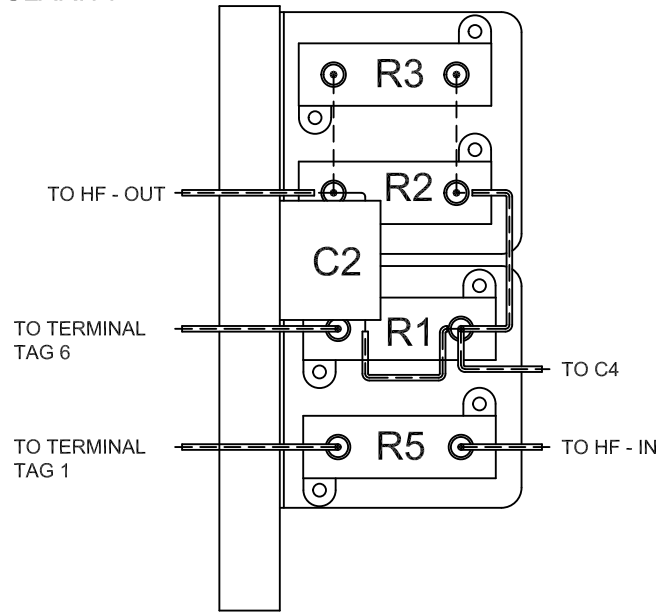

- NOTES:
1. ENSURE ALL COMPONENTS AND WIRES ARE SECURELY FIXED IN PLACE USING BLACKTITE, WITH DESCRIPTIONS VISIBLE.
 2. ALL ELECTRICAL CONNECTIONS TO BE SOLDERED.
 3. USE SILVER LINK WIRE WERE REQUIRED ENSUREING THEY ARE SECURELY FIXED IN POSITION.

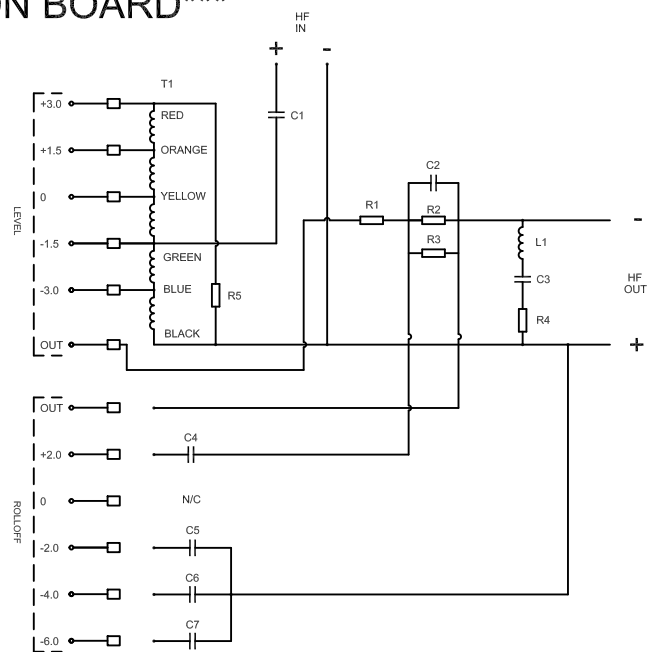

R1	4R7	50W	2252 0204
R2	56R	50W	2252 0213
R3	56R	50W	2252 0213
R4	15R	9W	2252 3190
R5	47R	50W	2252 0209

C1	5u6	630V	2606 1401
C2	0.33u	630V	2606 1406
C3	1u3	1000V	7100 0109
C4	0.22u	250V	2606 0668
C5	0.33u	250V	2606 1520
C6	0.47u	160V	2606 0666
C7	0.68u	160V	2606 0667

L1	2.7mH AIR CORE	7100 0208
----	----------------	-----------

T1	TRANSFORMER	7100 0061
----	-------------	-----------

ENSURE ALL
FIXING HOLES
ARE CLEAR OF
COMPONENTS.

BRACKETS
5470 0107(2)

CABLE TIE
4800 0070 (2)

TERMINAL GOLD
4783 0408(15)

LEAD ASSY
7500 0733

LEAD ASSY
7500 0733

BOARD
5112 0154

LEAD ASSY
7500 0732

TANNOY.

The contents, information and
copyright of this document are
the sole property of Tannoy Ltd
and must not be published
applied or copied without the
express knowledge & permission
of the owners.

MATERIAL

FINISH

ALL DIMENSIONS IN MILLIMETRES

Limits of tolerance unless stated:

One place of decimal dim. ±0.4mm

Two places of decimal dim. ±0.1mm

Holes 12.0mm dia. & under +0.1-0.0mm

Holes over 12.0mm dia. ±0.4mm

RoHS Compliant

Drawn

Checked

Approved

Scale **NTS**

TITLE CROSSOVER - TYPE 1755 KENSINGTON GR HF

CROSSOVER - TYPE 1755 **A3**

7300 1395

PART No.

7300 1395

First used on

KENSINGTON GR

Issues

A 25.03.13 MP