


*** NOTE PRINT PRODUCT PART AND TYPE NUMBER ***

TYPE	DESCRIPTION	NOTES
R1	6R8/9W/5% WW	
R2	10R/9W/5% WW *	
R3	1R0/9W/5% WW	
C1	1µ8/160V	5% POLYPROP/MASTIC DAMPED
C2	1µ8/100V	5% POLYESTER
C3	12µ/100V	5% POLYESTER
L1	0.65mH *	LAM. IRON CORE
L2	0.83mH DCR<0.25R	LAM. IRON CORE

7300 1475


REV XT

A 25/02/15 MP

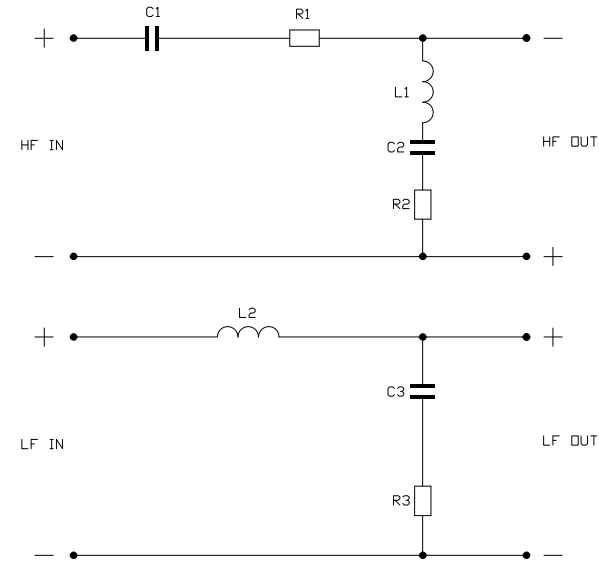

* L1 CAN BE MADE SMALL, BUT ADJUST
VALUE OF R2 TO COMPENSATE FOR DCR

INTERNAL WIRING - EQUIVALENT TO VAN
DEN HUL CS18 (SILVER PLATED COPPER)

- NOTES:
- 1. ENSURE COMPONENTS ARE SECURELY FIXED IN PLACE USING HOTMELT, WITH DESCRIPTIONS VISIBLE.
 - 2. REINFORCE JOINTS AND CABLE TIES WITH HOT MELT ADHESIVE TO ENSURE COMPONENT SECURITY. SEE - 
 - 3. ENSURE FIXING HOLES ARE CLEAR OF COMPONENTS AND HOTMELT GLUE.
 - 4. ENSURE COMPONENT L1 IS POSITIONED ON PCB BOARD AS SHOWN.