


TANNOY®
arena
HIGHLINE 500 LCR



OWNER'S MANUAL

CONTENTS

WARRANTY	3
INTRODUCTION	4
ROTATABLE BADGE	5
ARENA HIGHLINE 500 LCR (for satellite position)	
What's in the box?	6
How to wall mount	7
STAND MOUNT	
What's in the box?	10
How to stand mount	11
ARENA HIGHLINE 500 LCR (for centre channel position)	
What's in the box?	12
How to wall mount	13
ROOM SET UP	15
CONNECT TO RECEIVER	16
SPECIFICATIONS	17

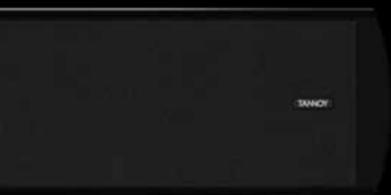

WARRANTY

This equipment has been produced and tested with care and precision. All Tannoy speaker systems are built to give first class service and carry a 5-year warranty. Active subwoofers carry a 1-year warranty.

If the equipment proves to be defective within this period for any reason other than accident, misuse, unauthorised modification or fair wear and tear, Tannoy will repair any such defect or, at our option, replace it without charge for parts, labour or return carriage.

This warranty is given in addition to the customer's statutory rights. If you suspect a problem with your loudspeakers please contact your local Tannoy dealer who will be able to advise on appropriate action.

IMPORTANT NOTES

Please ensure no bare wire touches the metal cabinet.

Please do not attempt to remove the grilles from the products as they are designed not to be removed. The product has been voiced with the grilles on.

No maintenance of this product is required. Use a dry, lint free cloth to clean the cabinet if required.

No loudspeaker cables are supplied with the Arena Highline 500 LCR.

We would recommend figure of eight speaker cables with 2 x 1.5mm² cross sectional area.

INTRODUCTION

Thank you for selecting Tannoy loudspeakers developed in the UK by our dedicated team of design engineers. The Tannoy Arena Highline 500 LCR speakers are designed to blend perfectly into your room and provide a sound stage which is at least as good as you would hear in a commercial movie theatre, but in the comfort of your own home. A wall mounting bracket and platform for centre channel use is included with the speaker. An optional floor stand and shelf / table stand is also available.

Tannoy Professional Studio Monitor speakers are used by mixing engineers, producers and directors in the creation and production of many movie soundtracks. Tannoy Arena Highline 500 LCR home cinema speakers are engineered with the same technology, design and manufacturing principles as Tannoy Studio Monitors to create realistic special effects with clear crisp dialogue capability. The carefully designed appearance of Tannoy Arena Highline 500 LCR system components allows discreet placement of the speakers giving the movie screen pride of place as the centre of the visual movie action.

TANNOY DUAL CONCENTRIC™


The Arena Highline 500 LCR loudspeakers incorporate the legendary Tannoy Dual Concentric™ drivers. Intensive research and development has produced an all-new version of this proven technology that builds upon the legendary performance of this exclusive Tannoy driver design. The time coherent, point source and constant directivity nature of the dispersion characteristics inherent in the Dual makes it an accepted industry standard in studio monitoring. By exceeding the rigorous demands of the recording and mastering environment Tannoy can ensure that playback performance in the home, whether in two channel stereo or multi channel home cinema mode, is strictly controlled to accurately reflect the sound engineer's artistry. In nature all sounds emanate from a single point in space. The high frequency unit of the Dual, centrally mounted in the throat of the main mid/bass driver, is so positioned as to acoustically replicate this single point source; delivering an incredibly natural sound with an incredibly wide imaging 'sweet spot' that creates an expansive soundstage with remarkably focused placement of vocals and instrumentation.

TANNOY WIDEBAND™

Tannoy has incorporated its own WideBand™ technology into the design of the Arena Highline 500 LCR loudspeakers. Not only does this exceptional in-house technology resolve fine detail of high frequency information but it also effectively enhances the listening experience throughout the whole frequency range. The WideBand™ high frequency system creates an increased immediacy, airiness and impact making music sound more natural and true to life. Music contains transient information and rich harmonics beyond the range of human hearing for pure tones. Even bass notes have leading edge transients reaching 30kHz. Operating between the roll-off point of the exclusive Tannoy mid-bass driver unit and 51kHz, the Tannoy WideBand™ high frequency unit will accurately reproduce the leading edge of individual notes allowing the listener to experience the entire bandwidth information of instruments. In addition, the extension of the frequency response, by fully two octaves, corrects time and phase response within the bandwidth of normal human hearing. Taking these acoustical phase anomalies beyond the audible range adds realism to the soundstage through improvements in imaging and the placement of instrumentation and movie special effects.

ROTATABLE BADGE

The Arena HighLine 500LCR is designed to be used either horizontally (e.g. centre channel) or vertically (e.g. wall or stand mounted satellite position). The Tannoy badge on the speaker has been designed to swivel to the required position for horizontal or vertical use. In horizontal position the badge can appear either to the right or left hand side of the speaker and in vertical position the badge can appear either to the top or bottom of the speaker. The badge has a spring mechanism which holds it locked in its finally chosen position at 90 degree intervals. To swivel the badge through 90 degrees it needs to be carefully lifted away from the grille by approx 2 - 3 millimetres (approx 0.1") only and then turn to the desired position. To pull the badge upwards it should be gripped with finger nails to either side and slightly underneath.

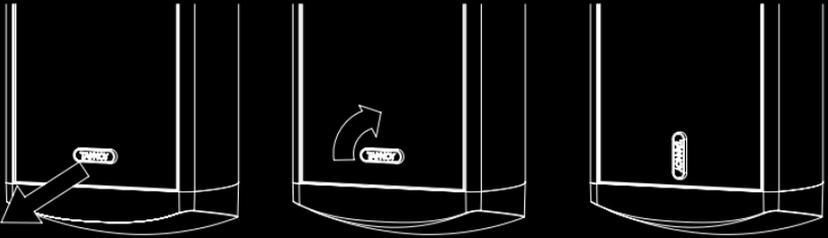


- Grip with finger nails to either side of badge and gently pull (approx 2 – 3mm / 0.1" only)
- Swivel to desired position
- Allow spring mechanism to hold in final position

ARENA HIGHLINE 500 LCR (for satellite position)**What's in the box?**

- 1 x LCR speaker
- 1 x Long wall bracket
- 1 x Short bracket with pre-fitted cap
- 1 x Short bracket without pre-fitted cap
- 1 x Bracket cap
- 4 x 8mm Silver hex socket fixing screw + lock washers
- 1 x 5mm black cap head fixing screw + spring washer
- 1 x Ball nosed Allen key
- 1 x Platform (for centre channel use only)

**Required but not included:**

- Sufficient cable for your requirements
- Countersunk fixing screws suitable for your wall type
- Screwdriver for above fixing screws
- Spirit level

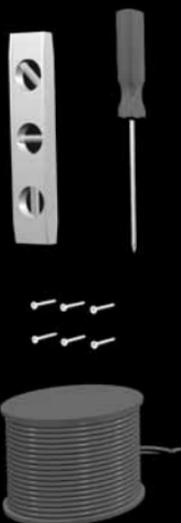

ARENA HIGHLINE 500 LCR (for satellite position)


How to wall mount

WARNING: It is your responsibility to ensure that the bracket to wall fixing screws or bolts and the walls themselves are strong enough to support the weight of the speaker – refer to the speaker weight specifications supplied in this manual. Particular care is needed when fixing to hollow or cavity walls - “stud” walls. Use only professionally recommended fixing devices which will spread the load of the brackets and fixing screws over an area of the wall surface when mounting to cavity walls. Pay particular attention to the possibility of electrical cables and gas or water pipes which may be present in the wall cavity or buried in the wall surface. Use a special cable or metal proximity locator to locate these obstacles if in any doubt.

Before wall mounting the bracket, ensure sufficient clearance to hook the speaker onto bracket (approx half speaker length above bracket).

Use a spirit level to ensure the bracket is fitted level.

Mount the wall bracket on the wall with a suitable fixing (not supplied – see warning note above)

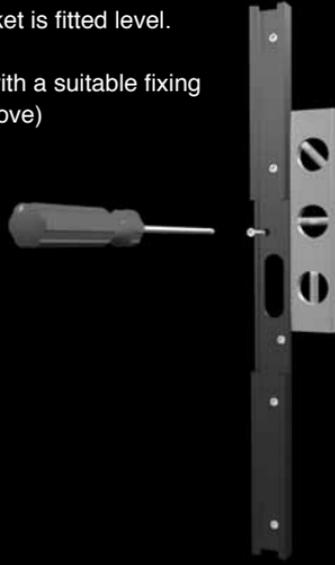

Ensuring cap is uppermost, using 8mm screws and washers provided, attach bracket with pre-fitted cap to top two fixing points on speaker.

Attach bracket without pre-fitted cap to bottom two fixing points using 8mm screws and washers provided.



arena
HIGHLINE 500 LCR

ARENA HIGHLINE 500 LCR (for satellite position) How to wall mount - continued


Cut the speaker wire so that the (+) side is slightly longer than the (-) side and feed the speaker wire through spare bracket cap.

Important Note:

It is essential that the speakers are wired correctly at this stage. The (-) wire should have a solid black line, or similar, marked along it.

Screw (+) wire into red terminal and screw (-) wire into black terminal.

Offer speaker up to wall bracket half way above it, engage speaker and slide down.

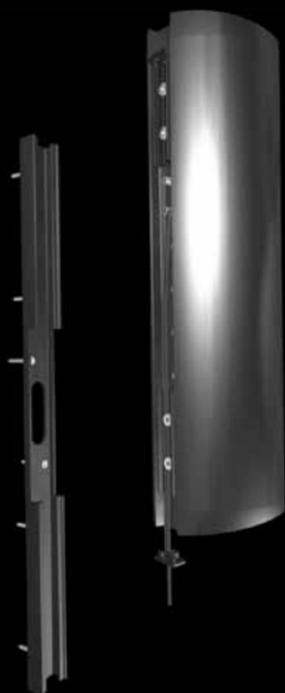

Ensure cap is fully engaged with wall bracket



ARENA HIGHLINE 500 LCR (for satellite position)
How to wall mount - continued

Fix spare cap to bottom of bracket using cap screw and spring washer provided.



STAND MOUNT

What's in the box?

- 1 x Stand mount
- 2 x Lock washers
- 2 x Fixing screws
- 6 x Spikes
- 6 x Rubber feet
- 6 x M6 nuts



STAND MOUNT

How to stand mount

Attach the spike kits, or rubber feet, to the bottom of the stand then thread the cable through the stand base and shaft.



Cut the speaker wire so that the (+) wire is slightly longer than the (-) wire. Screw the (+) wire into the red terminal and screw (-) wire into black terminal.

Important Note: It is essential that the speakers are wired correctly at this stage.

The (-) wire should have a solid black line or similar marked along it.

Offer the speaker up to the stand and use the 2 lock washers and fixing screws to fit the speaker to the stand. Choose two fixing points on rear of speaker which give the best height for your requirements.




ARENA HIGHLINE 500 LCR (for centre channel position)
What's in the box?

- 1 x LCR speaker
- 1 x Long wall bracket
- 1 x Short bracket with pre-fitted cap
- 1 x Short bracket without pre-fitted cap
- 1 x Bracket cap
- 4 x 8mm Silver hex socket fixing screw + lock washers
- 1 x 5mm Black cap head fixing screw + spring washer
- 1 x Ball nosed allen key
- 1 x Platform (for centre channel use only)



- Required but not included:**
- Sufficient cable for your requirements
 - Countersunk fixing screws suitable for your wall type
 - Screwdriver for above fixing screws
 - Spirit level

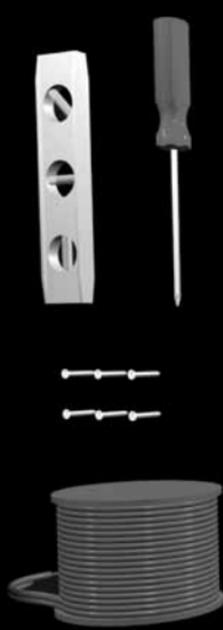

ARENA HIGHLINE 500 LCR (for centre channel position)

How to wall mount

WARNING: It is your responsibility to ensure that the bracket to wall fixing screws or bolts and the walls themselves are strong enough to support the weight of the speaker - refer to the speaker weight specifications supplied in this manual. Particular care is needed when fixing to hollow or cavity walls - "stud" walls. Use only professionally recommended fixing devices which will spread the load of the brackets and fixing screws over an area of the wall surface when mounting to cavity walls. Pay particular attention to the possibility of electrical cables and gas or water pipes which may be present in the wall cavity or buried in the wall surface. Use a special cable or metal proximity locator to locate these obstacles if in any doubt.

Before wall mounting the centre wall bracket, ensure sufficient clearance to hook the speaker onto the bracket (approx half the speaker length to the left or right of the bracket).

Use a spirit level to ensure the bracket is fitted level.

Mount the bracket on the wall with a suitable fixing (not supplied - see warning note).



Using the 8mm screws and washers provided attach the two small brackets to the fixing points. Ensure that the bracket with pre fitted cap has the cap facing outwards, on the side you have left clearance for hooking onto the wall.



Thread the speaker wire through the spare cap.

Important note: It is essential that the speakers are wired correctly at this stage. The (-) wire should have a solid black line or similar marked along it.


Screw the (+) wire into the red terminal and screw (-) wire into black terminal.




arena
HIGHLINE 500 LCR

ARENA HIGHLINE 500 LCR (for centre channel position)
How to wall mount - continued

Offer the speaker up to the wall bracket half way along. Engage speaker with bracket and slide across.

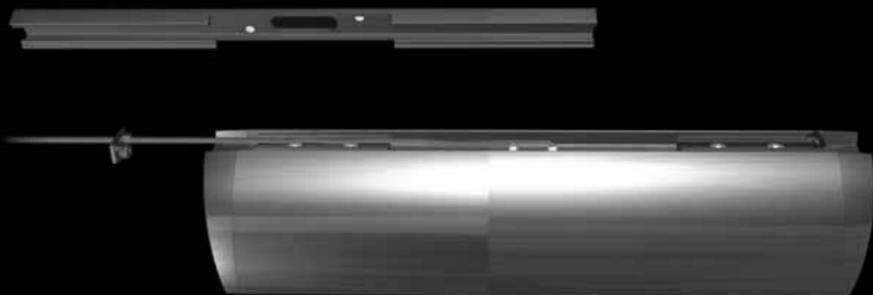

Ensure cap is fully engaged with the wall bracket.

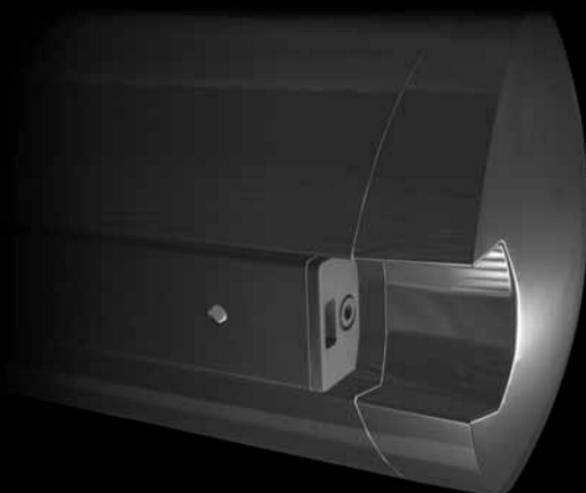

Fix spare cap to bottom of bracket using the cap screw and spring washer provided.




ROOM SETUP

A 5.1 surround sound system consists of 5 separate speakers and one subwoofer. The LCR used in the centre channel position is designed to reproduce most of the dialogue or solo performances. The front left and right speakers reproduce the left/right stereo information and special effects. The rear left and right speakers reproduce special effects.

Try to get all 3 front speakers equidistant from the listening position and in the same plane, for example along a back wall which may be present just behind the viewing screen or TV cabinet.

The front centre speaker should be mounted either above or below the screen. It may be mounted behind a projector screen only if the screen is acoustically transparent.

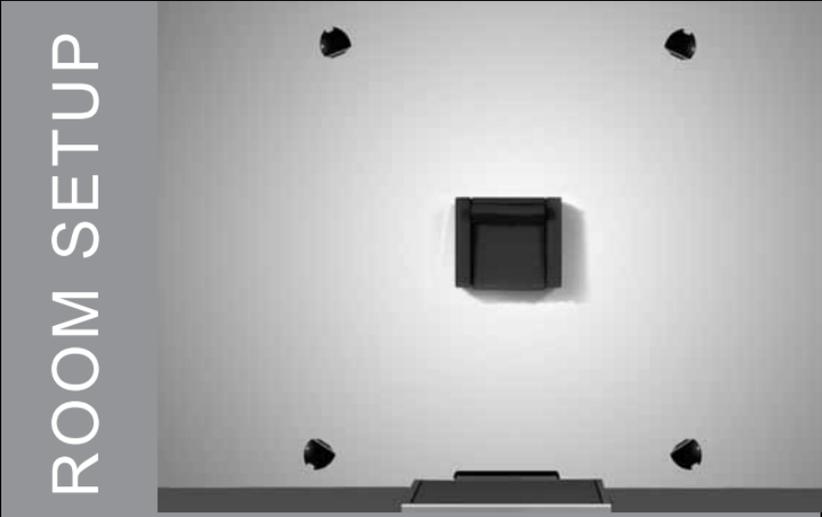


CONNECTING THE SYSTEM TO YOUR AV RECEIVER

Wire up the system connecting each speaker to the appropriate terminals on the receiver or amplifier making sure that cables connect red to red terminals (+ to +) and black to black terminals (- to -).

Please note : (+) is shown as grey, (-) is shown as white.

Take care to distinguish between left and right channels and the front and rear channels, as seen from the viewing position.

This is a very important stage in setting up. Getting things wrong at this stage is the most likely reason for disappointing results.

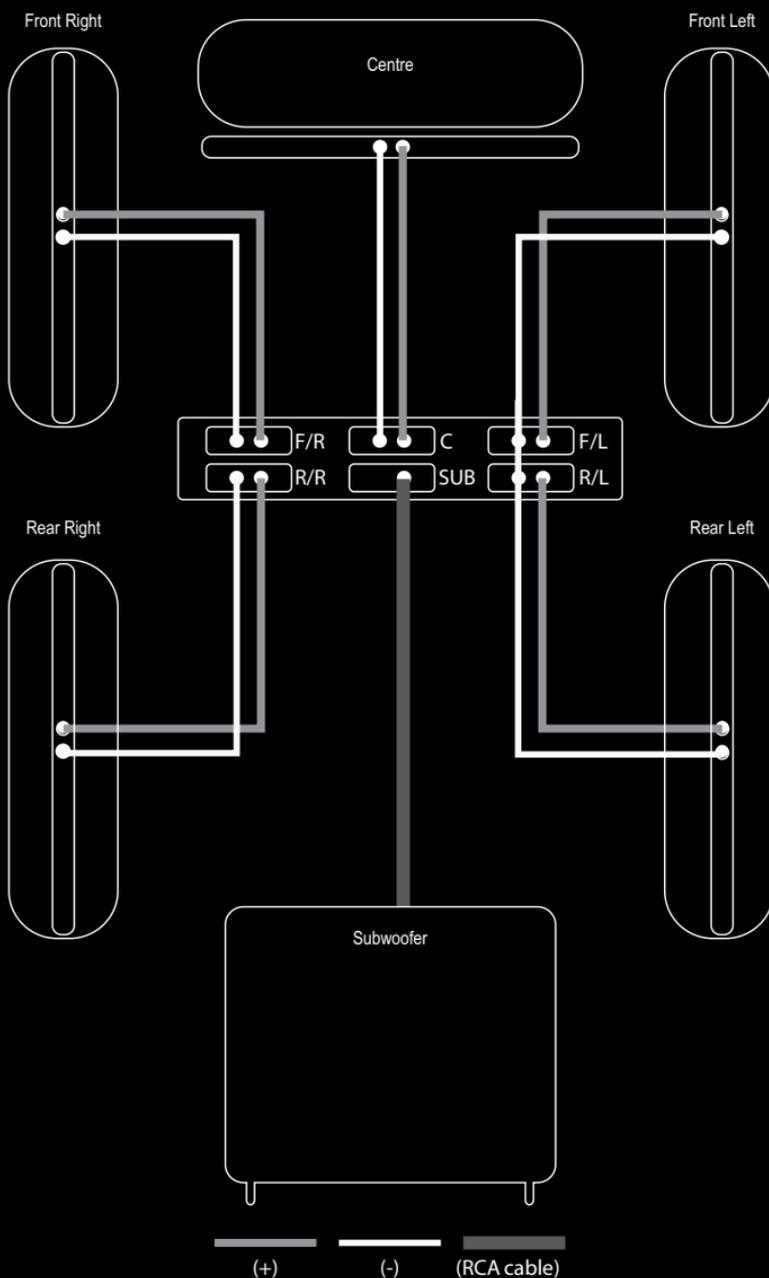


TECHNICAL SPECIFICATIONS


ARENA HIGHLINE 500 LCR

Recommended amplifier power	25 - 100W RMS
Maximum sensitivity (2.83V @ 1m)	88dB
Nominal impedance	8 Ohms
Frequency response (-6dB)	85Hz- 54kHz
Drivers	1 x 100mm (4") Dual Concentric™ with 19mm (0.75") HF 1 x 100mm (4") LF
Crossover frequency	1.75kHz
Magnetic shielding	Yes
Weight	6.5kg (14.3lbs)
Dimensions H x W x D	593 x 149 x 124mm (23.34 x 5.87 x 4.88")
Finish	Black gloss
Supplied accessories	Aluminium wall bracket Platform for centre channel use
Optional accessories	Floor stand Shelf / table stand for satellite use

ARENA HIGHLINE 500 LCR (centre position)

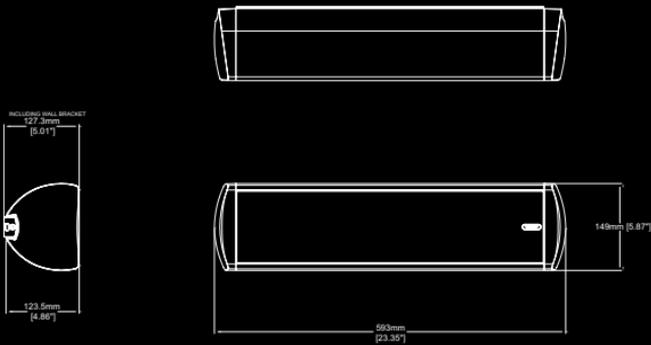


ARENA HIGHLINE 500 LCR (satellite position)

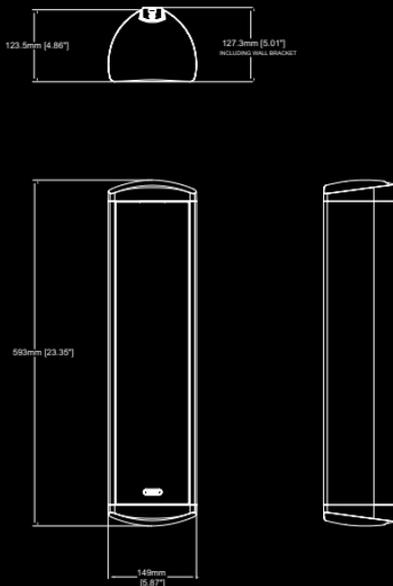

arena
HIGHLINE 500 LCR

**ARENA HIGHLINE 500 LCR ACCESSORY STAND
(FOR SATELLITE POSITION)**

Weight 5.9kg (13lbs)
Dimensions H x W x D 760 x 209 x 197mm
 (29.90 x 8.23 x 7.76")
Finish Black gloss

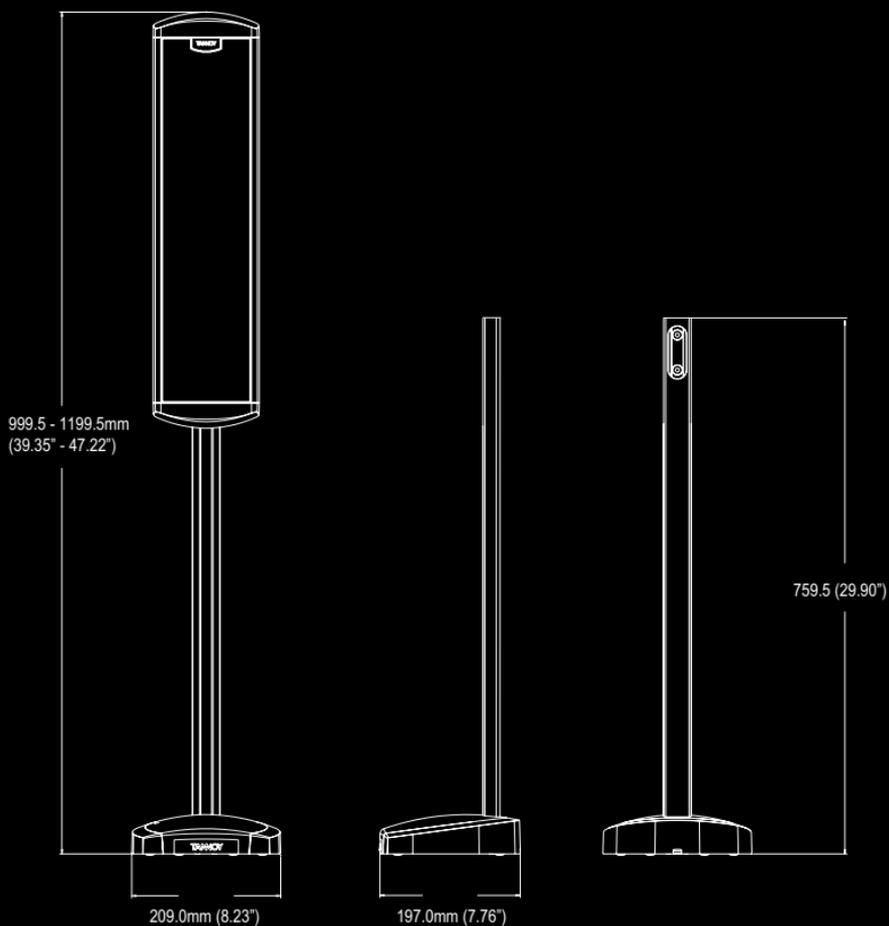

arena
HIGHLINE 500 LCR

tannoy.com

Tannoy United Kingdom	T: 00 44 (0) 1236 420199	E: enquiries@tannoy.com
Tannoy Deutschland	T: 00 49 (180) 1111 881	E: anfragen@tannoy.com
Tannoy Middle East	T: 00 971 (04) 4401208	E: enquiries@tannoy.com
TCIGroup International	T: 00 45 8742 7000	E: info@tcgroup-international.com
TCIGroup Americas	T: 00 1 (519) 745 1158	E: info@tcgroup-americas.com



6481 0570

Tannoy adopts a policy of continuous improvement and product specification is subject to change.