



DPE -06

DUAL PARAMETRIC EQUALIZER

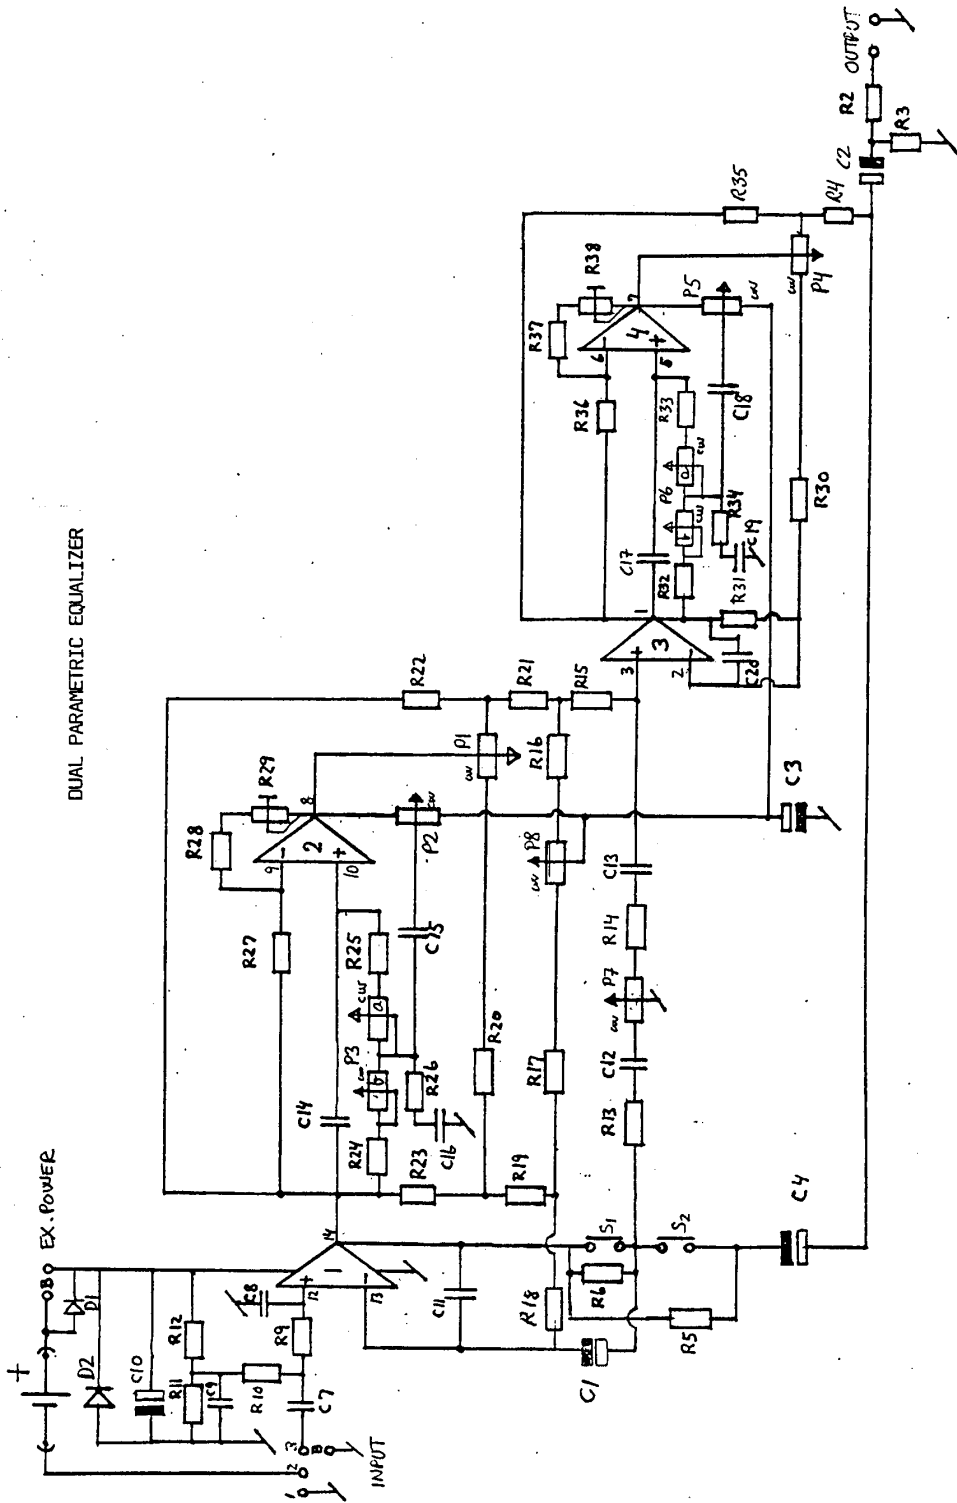

DATE	DRG.	APP.	TITLE	DRG NO.
800811		IKR	SCHEMATIC TC DUAL PAR. EQUALIZER	1401-6
SCALE	MAT.	PART OF	doc. TC DPE version 06	OF DESIGN
				t.c. electronic

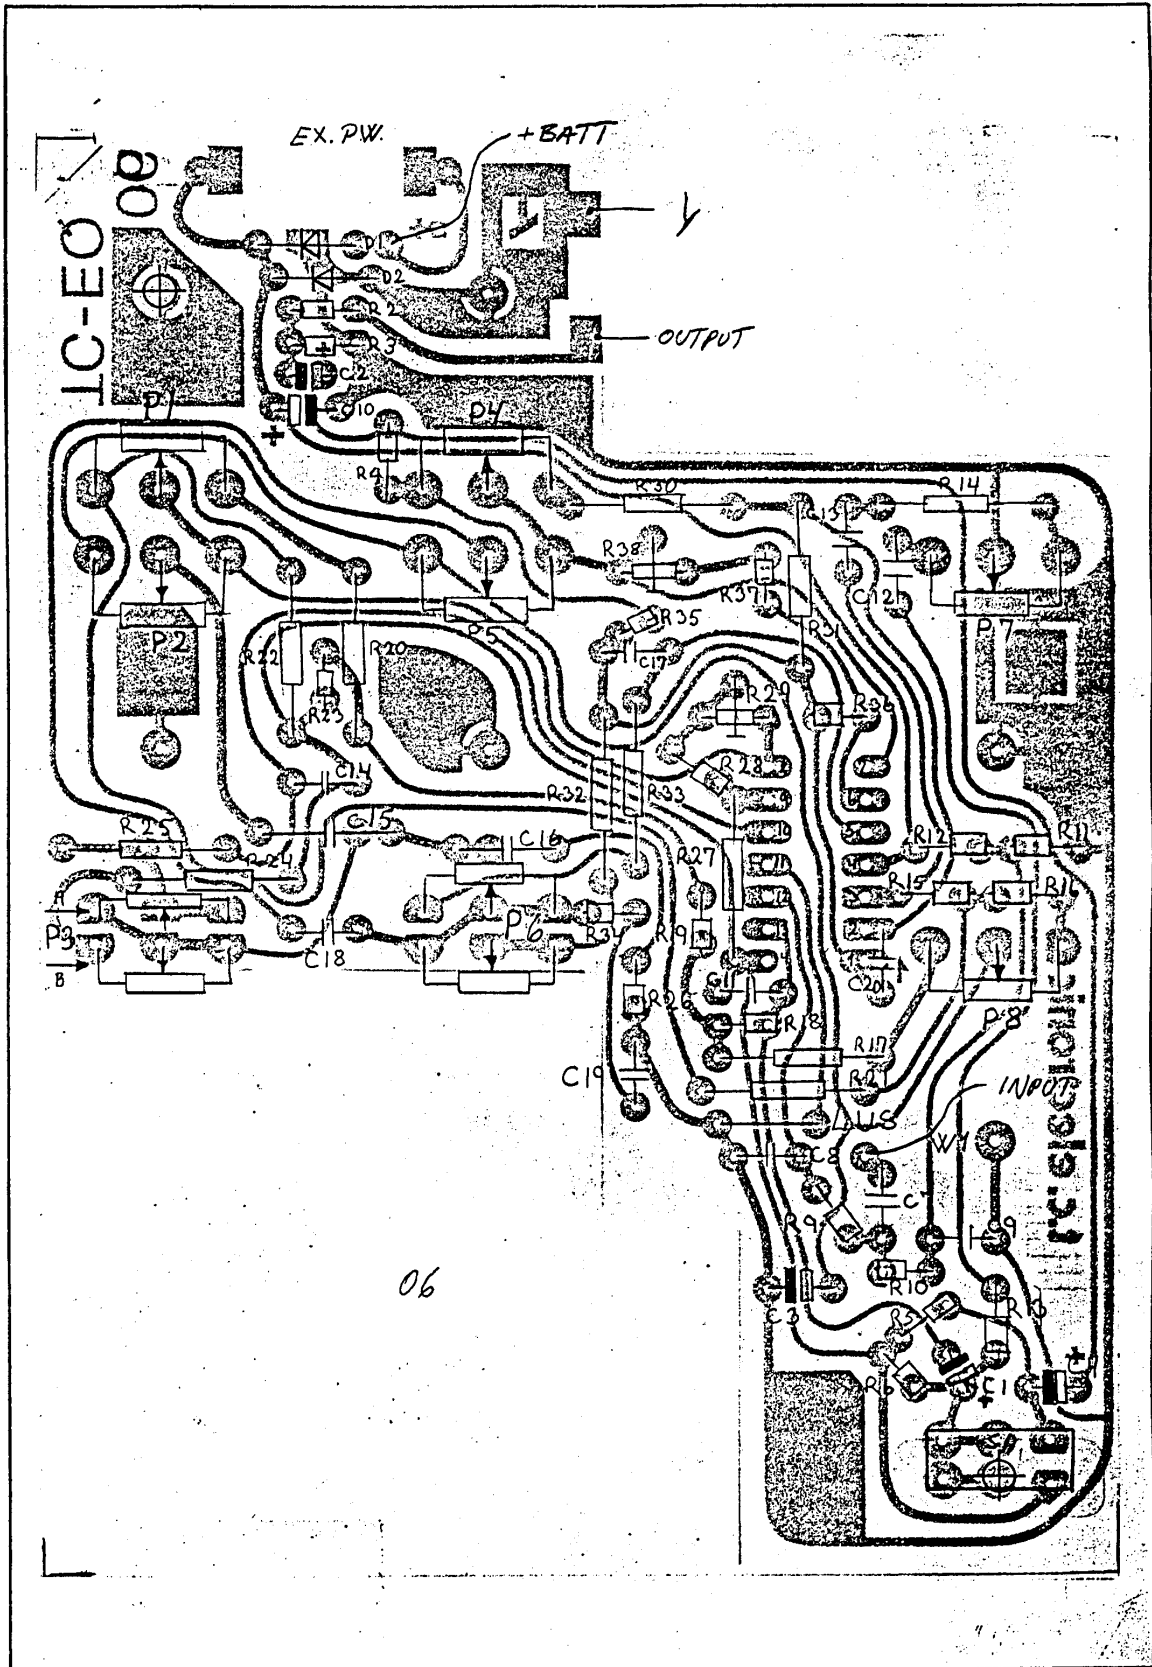

DATE	DRG.	APP.	TITLE	DRG. NO.
800901	8	WR	PARTS LAYOUT DUAL PAR. EQUALIZER	1401-6
SCALE	MAT.	PART OF	t.c. electronic OF DENMARK	
		doc. OPE version 06		

RESISTORS

R 1		R21	3,3 KOhm
R 2	150 Ohm	R22	1,5 KOhm
R 3	470 KOhm	R23	1,8 KOhm
R 4	1 KOhm	R24	680 Ohm
R 5	100 KOhm	R25	680 Ohm
* R 5	470 KOhm		
R 6	470 KOhm	R26	68 Ohm
R 7		R27	10 KOhm
R 8		R28	1 KOhm
* R 8	68 Ohm		
R 9	2,2 KOhm	R29	1 KOhm Trim.
R10	1 MOhm	R30	150 Ohm
R11	1,5 MOhm	R31	1,5 KOhm
R12	1,5 MOhm	R32	680 Ohm
R13	1,5 KOhm	R33	680 Ohm
R14	1,5 KOhm	R34	68 Ohm
R15	10 KOhm	R35	1,5 KOhm
R16	68 Ohm	R36	10 KOhm
R17	470 Ohm	R37	1 KOhm
R18	10 KOhm	R38	1 KOhm Trim.
R19	3,3 KOhm		
R20	150 Ohm		

CAPACITORS

C 1	4,7 uF	16V ellyt(mini)	C11	100 pF	plaq.
* C 1					
C 2	4,7 uF	16V ellyt(mini)	C12	22 nF	20% poly.
C 3	470 uF	16V ellyt	C13	22 nF	20% poly.
C 4	22 uF	16V ellyt	C14	22 nF	20% poly.
C 5	4,7 uF	16V mini	C15	220 nF	10% poly.
* C 5	22 uF	16V ellyt			
C 6			C16	100 nF	10% poly.
C 7	22 nF	10% poly.	C17	4,7 nF	20% poly.
C 8	220 pF	plaq.	C18	47 nF	20% poly.
C 9	100 nF	10% poly.	C19	22 nF	20% poly.
C10	10 uF	40V ellyt	C20	4,7 nF	plaq.

Components marked w.* are for DPE version 05

POTENTIOMETERS

P 1	4,7 KOhm	LIN
P 2	1 KOhm	LOG
P 3	100 KOhm	NEGLOG STEREO
P 4	4,7 KOhm	LIN
P 5	1 KOhm	LOG
P 6	100 KOhm	NEGLOG STEREO
P 7	22 KOhm	LIN
P 8	22KOhm	LIN

INTEGRATED CIRCUITS

IC 1	HA 4156 or 4741 GR3 (Selected)
------	--------------------------------------

DIODES

D 1	1N4148
D 2	1N4001